S Single Cavity Application

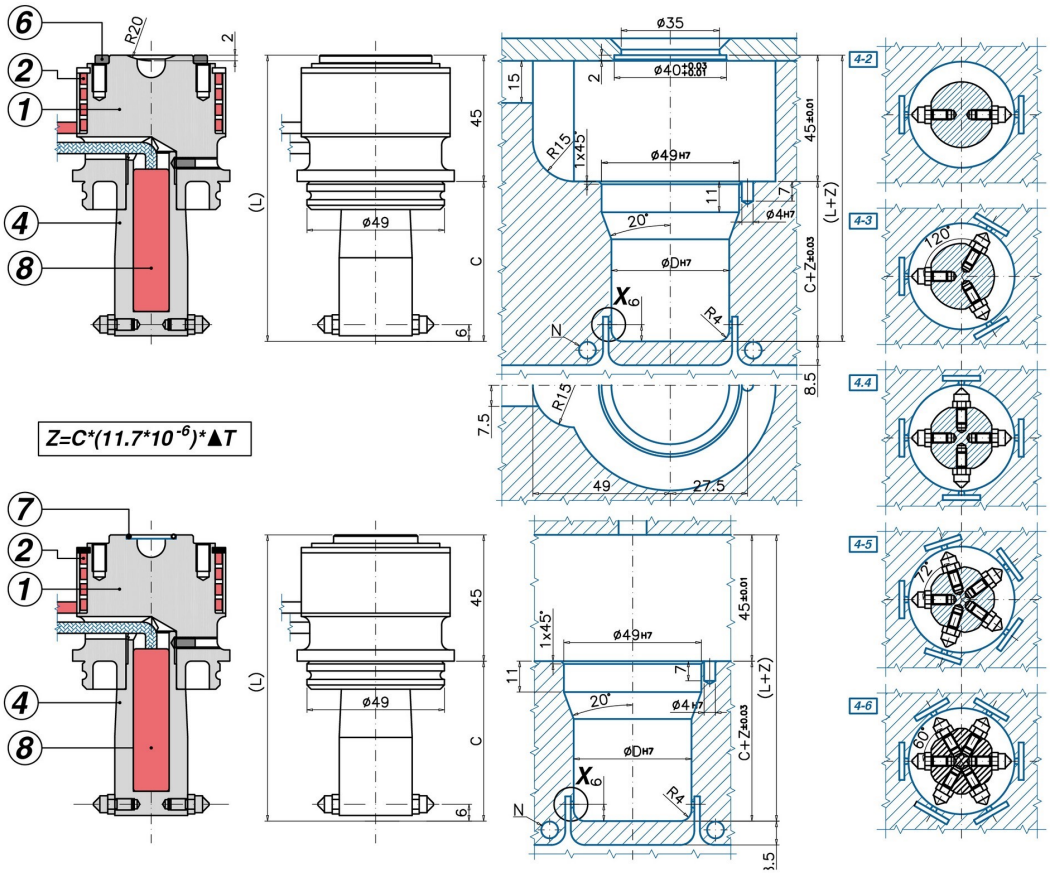

M MultiCavity Application

Code		C - L	1	2	4/0 - 2/3/4/5/6	4/1 - 2/3/4/5/6	6	7	8
UGGSL5510	**2/3/4/5/6 M 0/1**	C=57 L=102	UGCRG55M	REPTS550	UGPML501 2/3/4/5/6	UGPML511 2/3/4/5/6	-	UGACOR14	1270051B0400X
UGGSL5510	**2/3/4/5/6 S 0/1**	C=57 L=102	UGCRG55S	REPTS550	UGPML501 2/3/4/5/6	UGPML511 2/3/4/5/6	UGAS4030	-	1270051B0400X
UGGSL5520	**2/3/4/5/6 M 0/1**	C=69 L=114	UGCRG55M	REPTS550	UGPML502 2/3/4/5/6	UGPML512 2/3/4/5/6	-	UGACOR14	1270064B0400X
UGGSL5520	**2/3/4/5/6 S 0/1**	C=69 L=114	UGCRG55S	REPTS550	UGPML502 2/3/4/5/6	UGPML512 2/3/4/5/6	UGAS4030	-	1270064B0400X
UGGSL5530	**2/3/4/5/6 M 0/1**	C=81 L=126	UGCRG55M	REPTS550	UGPML503 2/3/4/5/6	UGPML513 2/3/4/5/6	-	UGACOR14	1270076B0400X
UGGSL5530	**2/3/4/5/6 S 0/1**	C=81 L=126	UGCRG55S	REPTS550	UGPML503 2/3/4/5/6	UGPML513 2/3/4/5/6	UGAS4030	-	1270076B0400X
UGGSL5540	**2/3/4/5/6 M 0/1**	C=93 L=138	UGCRG55M	REPTS550	UGPML504 2/3/4/5/6	UGPML514 2/3/4/5/6	-	UGACOR14	1270089B0500X
UGGSL5540	**2/3/4/5/6 S 0/1**	C=93 L=138	UGCRG55S	REPTS550	UGPML504 2/3/4/5/6	UGPML514 2/3/4/5/6	UGAS4030	-	1270089B0500X

INJECTION VESTIGE: T4L LATERAL MULTI-POINT, SINGLE TORPEDO NOZZLES WITH HEATED HEAD - YES: injecting more parts with one only nozzle - YES: more than one gate vestige on the same part - YES: SINGLE AND MULTY-CAVITY applications - YES: abrasive reinforcements (choose the 4/0 tip) - NO: colour change

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2 = Coil heater with J-type thermocouple
4/0 = Tempered steel torpedo + 2/3/4/5/6 abrasive charges tips UGPUGSA5-0
4/1 = Tempered steel torpedo + 2/3/4/5/6 Cu-Be tips UGPUGSA5-1
6 = Centering Ring
7 = O-Ring
8 = Cartridge heater with J type TC
S = Anti-rotation dowel pin

Ød= Standard : 0,6 ÷ 1,0
ØD= Standard: 42,0 - on request: 35 ÷ 48





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it