S Single Cavity Application

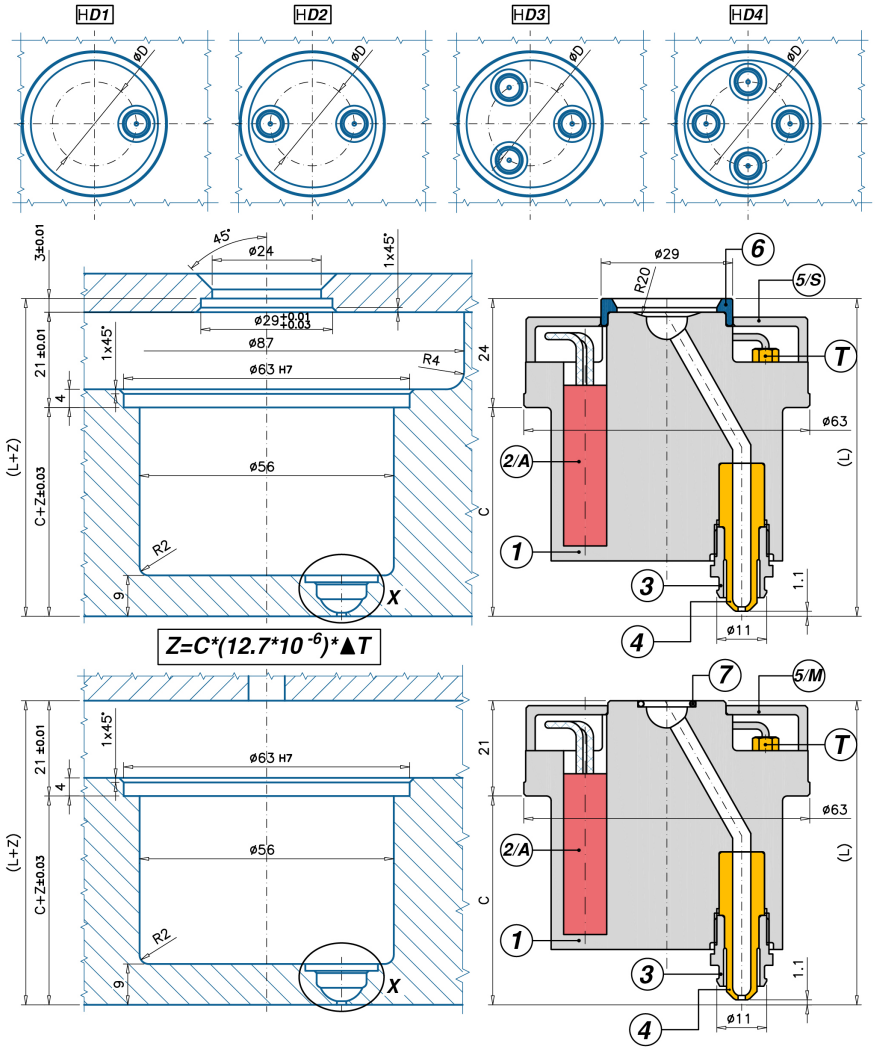

M MultiCavity Application

Code		C - L	1	2	T(2)	3	4/0	4/1	5	6 - 7
UGRR602 1/2/3/4	**M 0/1**	C 46 L 67	UGCRP62 1/2/3/4	0950038A0250X	SF1510510000J	UGBCRR60	UGPURR60TZ	UGPURR60CU	UGRP60PRM	UGACOR08
UGRR602 1/2/3/4	**S 0/1**	C 46 L 70	UGCRP62 1/2/3/4	0950038A0250X	SF1510510000J	UGBCRR60	UGPURR60TZ	UGPURR60CU	UGRP60PRS	UGAS2926
UGRR603 1/2/3/4	**M 0/1**	C 58 L 79	UGCRP63 1/2/3/4	0950051A0300X	SF1510510000J	UGBCRR60	UGPURR60TZ	UGPURR60CU	UGRP60PRM	UGACOR08
UGRR603 1/2/3/4	**S 0/1**	C 58 L 82	UGCRP63 1/2/3/4	0950051A0300X	SF1510510000J	UGBCRR60	UGPURR60TZ	UGPURR60CU	UGRP60PRS	UGAS2926
UGRR604 1/2/3/4	**M 0/1**	C 70 L 91	UGCRP64 1/2/3/4	0950064A0350X	SF1510510000J	UGBCRR60	UGPURR60TZ	UGPURR60CU	UGRP60PRM	UGACOR08
UGRR604 1/2/3/4	**S 0/1**	C 70 L 94	UGCRP64 1/2/3/4	0950064A0350X	SF1510510000J	UGBCRR60	UGPURR60TZ	UGPURR60CU	UGRP60PRS	UGAS2926

INJECTION VESTIGE: T5 MULTIPOINT NOZZLES FOR DIRECT AXIAL INJECTION - YES: injecting more parts with one only nozzle - YES: more than one gate vestige on the same part - YES: colour change - YES: abrasive reinforcements (choose the 4/0 tip) - YES: intense colours - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

1 = Multipoint body (No.1-2-3-4)
2 = Cartdrige heaters (No.3 for 1 and 3 points nozzles; No.4 for 2 and 4 points nozzles)
T2= J thermocouple
3 = Bushing
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
5 = Protection
(M=MultiCavity / S=Single Cavity)
6 = Centering Ring
7= O-Ring

Ød Standard : 0,6 ÷ 1,0 On request: 1,1 ÷ 2,0
ØD1= 23÷33
ØD2= 17÷33
ØD3= 19÷33
ØD4= 23÷33





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it