Hot runner manifolds model CCLDL1BQ-01T

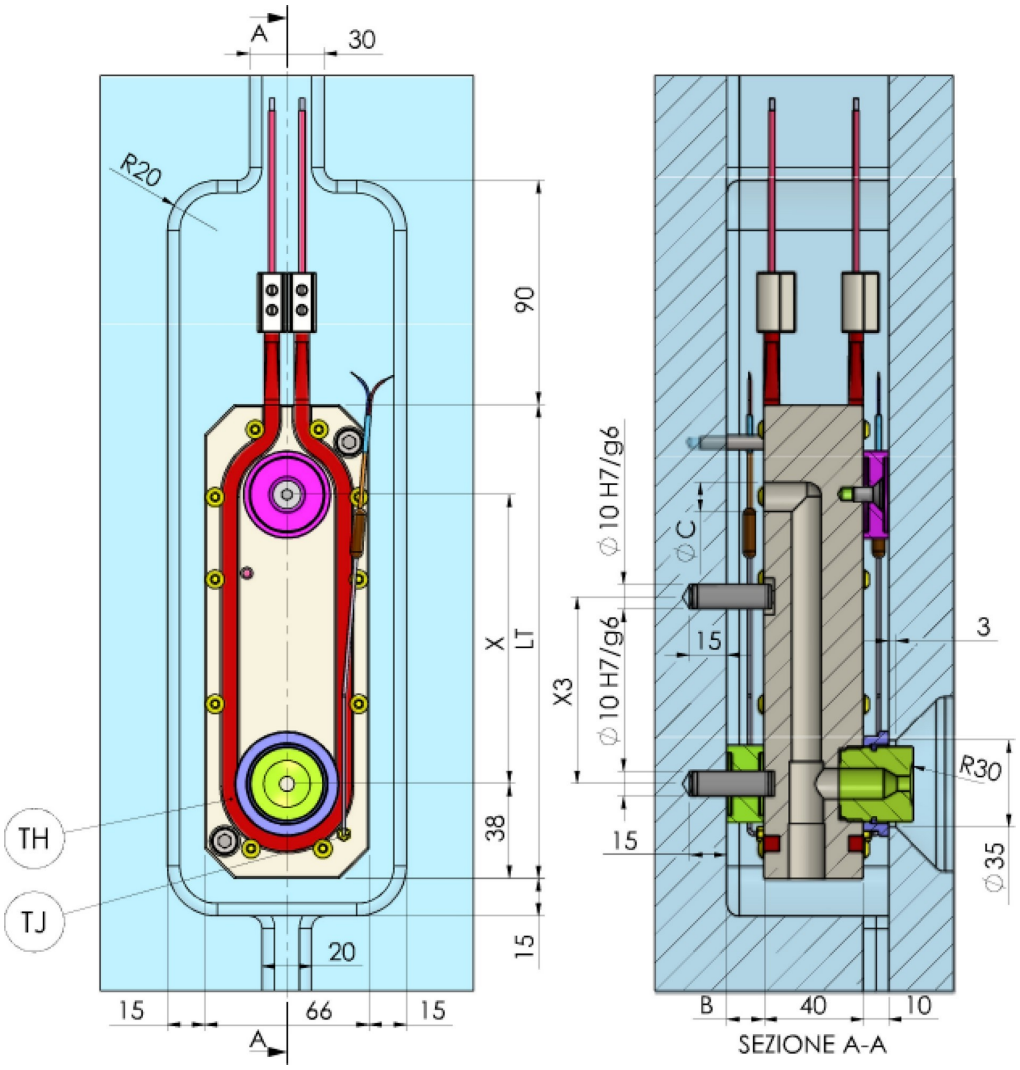

Code	LT	X3	X min	X max	TJ	TH (x 2pcs.)	ØC
CCLDL1BQT01015	150	110	>=29	<=75	SF151551000J	REQ50603500550U	5-6-7-8-9-10-11-12
CCLDL1BQT01017	170	130	>75	<=95	SF151551000J	REQ50604000650U	5-6-7-8-9-10-11-12
CCLDL1BQT01019	190	150	>95	<=115	SF151551000J	REQ50604500750U	5-6-7-8-9-10-11-12
CCLDL1BQT01021	215	175	>115	<=140	SF151551000J	REQ50605000800U	5-6-7-8-9-10-11-12
CCLDL1BQT01024	240	200	>140	<=165	SF151551000J	REQ50605500900U	5-6-7-8-9-10-11-12
CCLDL1BQT01026	265	225	>165	<=190	SF151551000J	REQ50606001000U	5-6-7-8-9-10-11-12
CCLDL1BQT01029	290	250	>190	<=215	SF151551000J	REQ50606501100U	5-6-7-8-9-10-11-12
CCLDL1BQT01031	315	275	>215	<=240	SF151551000J	REQ50607001200U	5-6-7-8-9-10-11-12
CCLDL1BQT01034	340	300	>240	<=265	SF151551000J	REQ50607501300U	5-6-7-8-9-10-11-12
CCLDL1BQT01036	365	325	>265	<=290	SF151551000J	REQ50608001350U	5-6-7-8-9-10-11-12
CCLDL1BQT01039	390	350	>290	<=315	SF151551000J	REQ50608501450U	5-6-7-8-9-10-11-12
CCLDL1BQT01041	415	375	>315	<=340	SF151551000J	REQ50609001550U	5-6-7-8-9-10-11-12
CCLDL1BQT01044	440	400	>340	<=365	SF151551000J	REQ50609501650U	5-6-7-8-9-10-11-12
CCLDL1BQT01046	465	425	>365	<=390	SF151551000J	REQ50610001750U	5-6-7-8-9-10-11-12
CCLDL1BQT01049	490	450	>390	<=415	SF151551000J	REQ50610501850U	5-6-7-8-9-10-11-12

Hot runner manifold with: No.1 offset drop and double heater circuit (No.1 heater on injection bushing side, No.1 heater on nozzle side)

No.1 drop offset - No.1+1 heater
TH = Armoured tubular heater 6 x 6 mm
TJ = J-type thermocouple with M4 fixing device
B = Min. 10 mm.(variable depending on the height of the nozzle head)
NOTE : centres for nozzle head of Ø26

@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it