S Single Cavity Application

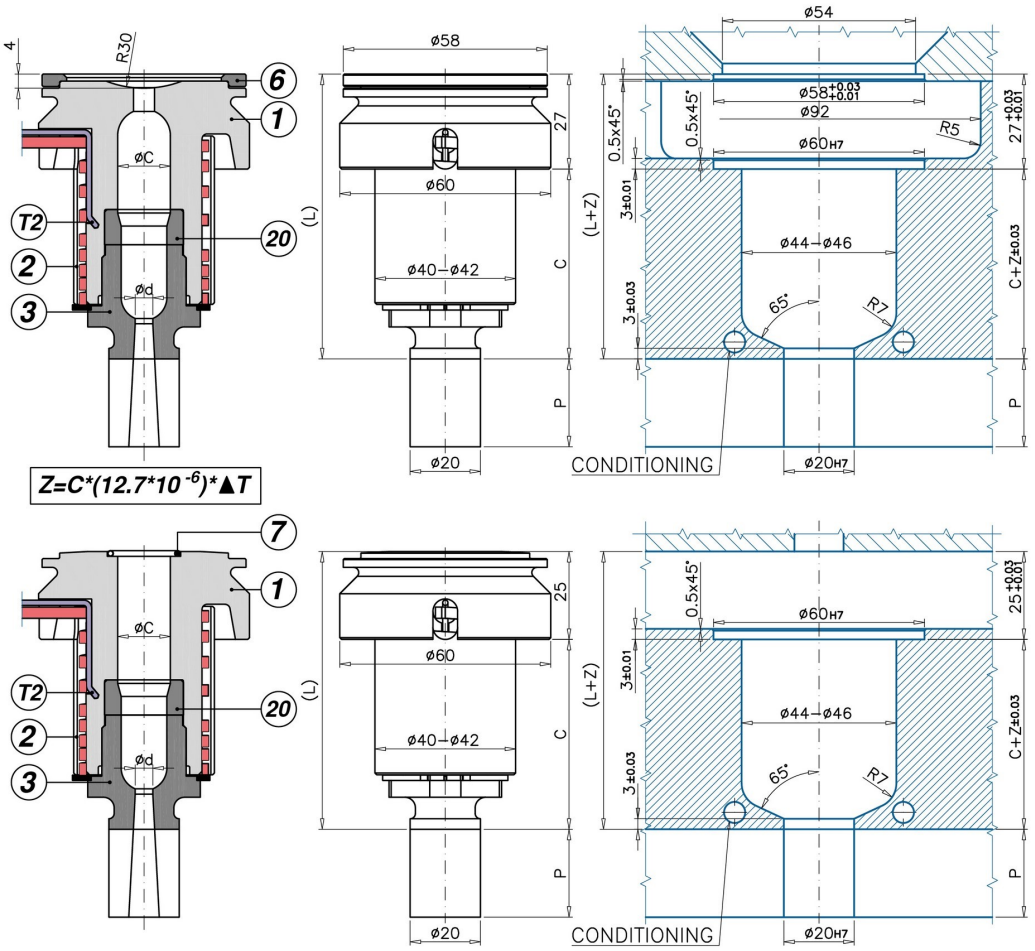

M MultiCavity Application

Code		C - L	1	2	T(2)	3 a 3° (-/P)	3 a 5° (-/P)	6	7
UGBE6002MA	**-/P 3/5**	C=54 L=79	UGCR6002M	REPNSP6002	S151051000J	UGBC60/P	UGBC605/P	-	UGACOR17
UGBE6002SA	**-/P 3/5**	C=54 L=81	UGCR6002S	REPNSP6002	S151051000J	UGBC60/P	UGBC605/P	UGAS5848	-
UGBE6003MA	**-/P 3/5**	C=74 L=99	UGCR6003M	REPNSP6003	S151551000J	UGBC60/P	UGBC605/P	-	UGACOR17
UGBE6003SA	**-/P 3/5**	C=74 L=101	UGCR6003S	REPNSP6003	S151551000J	UGBC60/P	UGBC605/P	UGAS5848	-
UGBE6004MA	**-/P 3/5**	C=94 L=119	UGCR6004M	REPNSP6004	S151551000J	UGBC60/P	UGBC605/P	-	UGACOR17
UGBE6004SA	**-/P 3/5**	C=94 L=121	UGCR6004S	REPNSP6004	S151551000J	UGBC60/P	UGBC605/P	UGAS5848	-
UGBE6005MA	**-/P 3/5**	C=114 L=139	UGCR6005M	REPNSP6005	S151551000J	UGBC60/P	UGBC605/P	-	UGACOR17
UGBE6005SA	**-/P 3/5**	C=114 L=141	UGCR6005S	REPNSP6005	S151551000J	UGBC60/P	UGBC605/P	UGAS5848	-
UGBE6007MA	**-/P 3/5**	C=164 L=189	UGCR6007M	REPNSP6007	S152051000J	UGBC60/P	UGBC605/P	-	UGACOR17
UGBE6007SA	**-/P 3/5**	C=164 L=191	UGCR6007S	REPNSP6007	S152051000J	UGBC60/P	UGBC605/P	UGAS5848	-

INJECTION VESTIGE: T1 OPEN FLOW NOZZLES - YES: injection on sprues - YES: intense colours, colour change and abrasive reinforcements - YES: MULTI-CAVITY applications - NO: direct moulding onto the part - NO: SINGLE CAVITY applications, for plastics with melting temperature higher than 250°C - NO: plastics leaving stringings/droolings while mould opens; in such instance you can use EP type nozzles - T2B/T2BP injection vestige.

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J Thermocouple
3 = Bushing
3/P = Bushing with machinable prolungation
5 = Copper ring
6 = Centering Ring
7 = O-RING
ØC = Standard 16 - On request: 17
Ød = Standard: 2,0-2,5-3,0-3,5-4,0-5,0-6,0-6,5
P = Standard: 25 - On request: 0,5 ÷ 24.9





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it