Hot runner manifolds model CCLDR1AQ-01T

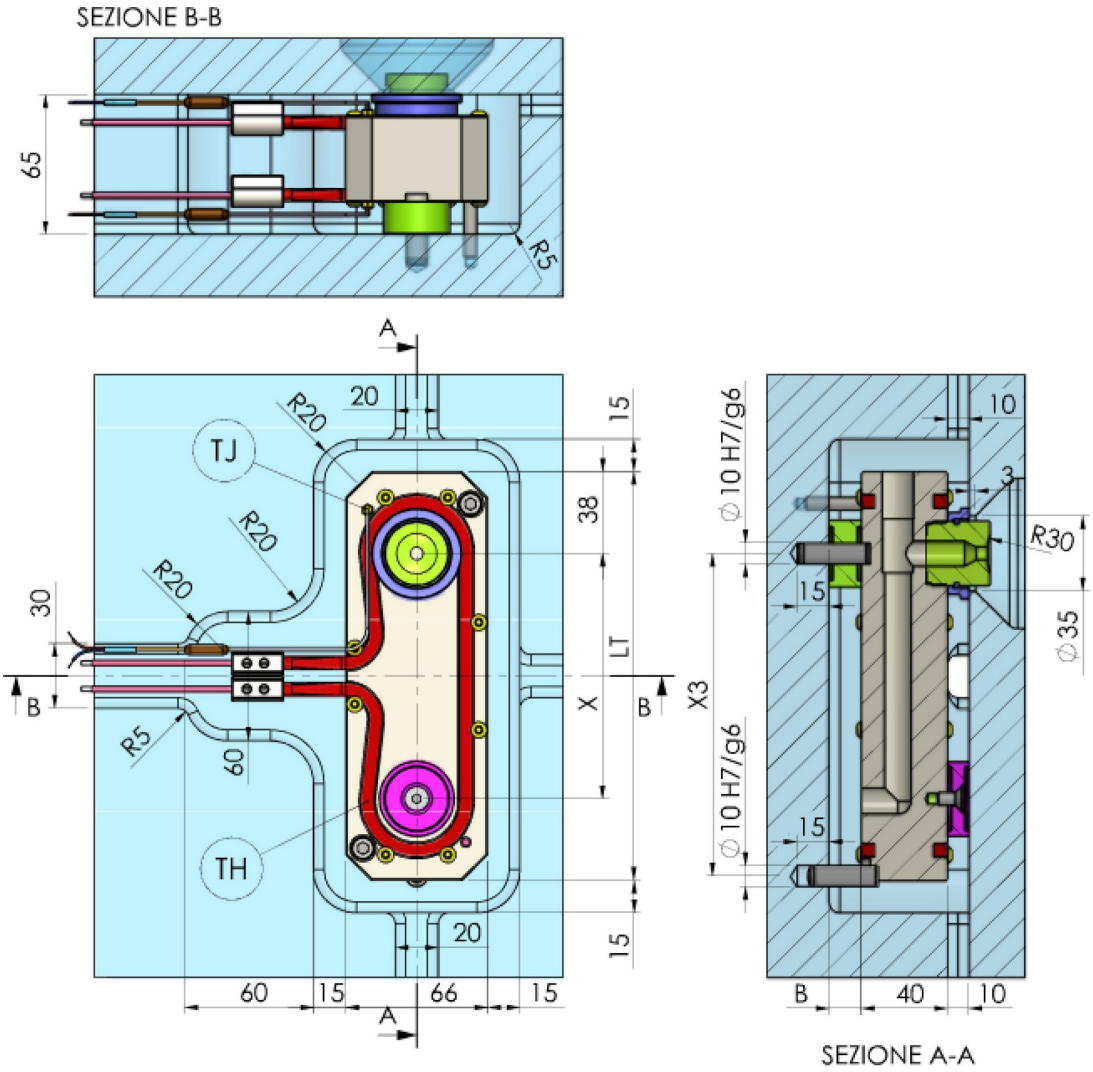

Code	LT	X3	X min	X max	TJ	TH (x 2pcs.)	ØC
CCLDR1AQT01015	150	110	>=29	<=75	SF151551000J	REQ50603500550T	5-6-7-8-9-10-11-12
CCLDR1AQT01017	170	130	>75	<=95	SF151551000J	REQ50604000650T	5-6-7-8-9-10-11-12
CCLDR1AQT01019	190	150	>95	<=115	SF151551000J	REQ50604500750T	5-6-7-8-9-10-11-12
CCLDR1AQT01021	215	175	>115	<=140	SF151551000J	REQ50605000800T	5-6-7-8-9-10-11-12
CCLDR1AQT01024	240	200	>140	<=165	SF151551000J	REQ50605500900T	5-6-7-8-9-10-11-12
CCLDR1AQT01026	265	225	>165	<=190	SF151551000J	REQ50606001000T	5-6-7-8-9-10-11-12
CCLDR1AQT01029	290	250	>190	<=215	SF151551000J	REQ50606501100T	5-6-7-8-9-10-11-12
CCLDR1AQT01031	315	275	>215	<=240	SF151551000J	REQ50607001200T	5-6-7-8-9-10-11-12
CCLDR1AQT01034	340	300	>240	<=265	SF151551000J	REQ50607501300T	5-6-7-8-9-10-11-12
CCLDR1AQT01036	365	325	>265	<=290	SF151551000J	REQ50608001350T	5-6-7-8-9-10-11-12
CCLDR1AQT01039	390	350	>290	<=315	SF151551000J	REQ50608501450T	5-6-7-8-9-10-11-12
CCLDR1AQT01041	415	375	>315	<=340	SF151551000J	REQ50609001550T	5-6-7-8-9-10-11-12
CCLDR1AQT01044	440	400	>340	<=365	SF151551000J	REQ50609501650T	5-6-7-8-9-10-11-12
CCLDR1AQT01046	465	425	>365	<=390	SF151551000J	REQ50610001750T	5-6-7-8-9-10-11-12
CCLDR1AQT01049	490	450	>390	<=415	SF151551000J	REQ50610501850T	5-6-7-8-9-10-11-12

Hot runner manifold with: No.1 offset drop and double heater circuit (No.1 heater on injection bushing side, No.1 heater on nozzle side)

No. 1 drop offset
TH = Armoured tubular heater 6 x 6 mm
TJ = J-type thermocouple with M4 fixing device
B = Min. 10 mm.(variable depending on the height of the nozzle head)
NOTE : centres for nozzle head of Ø26

@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it