


## S Single Cavity Application

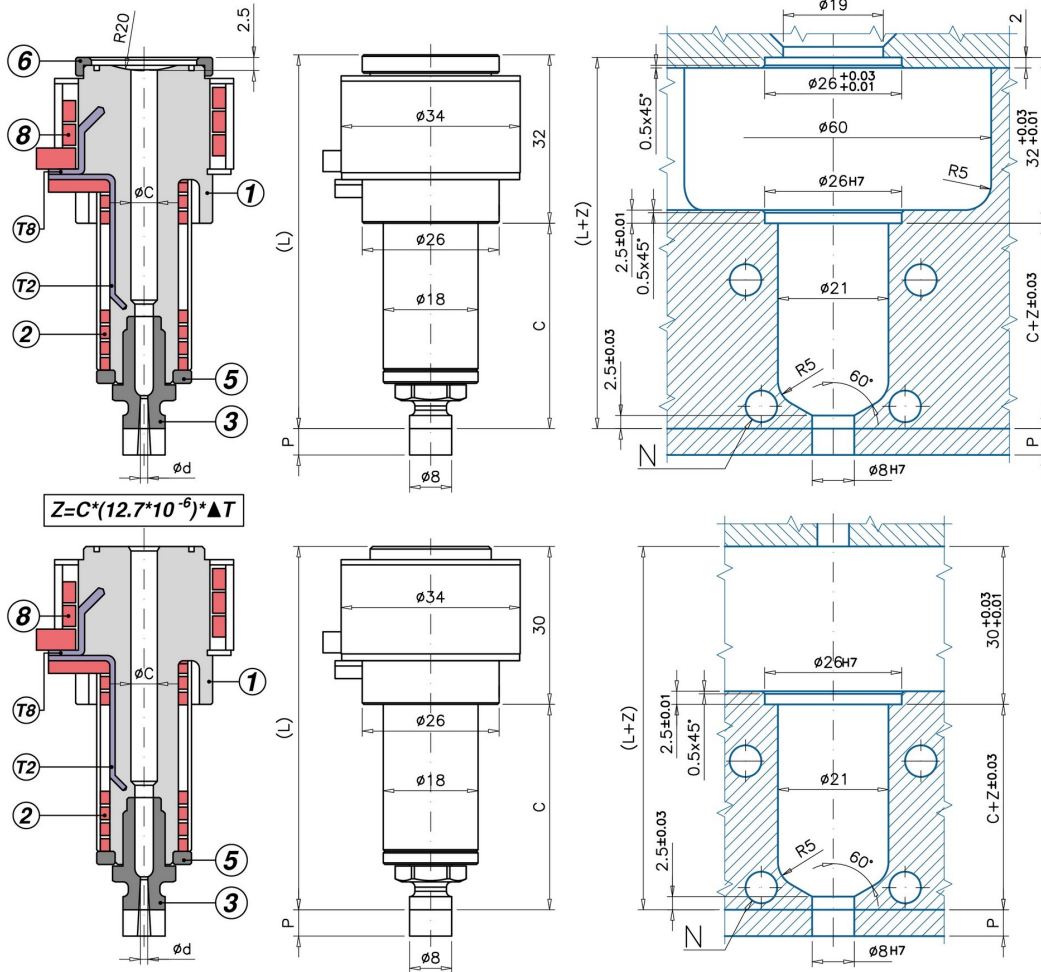

## M MultiCavity Application

Code	C - L	1	2	T(2)	3 a 3° (-/P)	3 a 5° (-/P)	5	6	8	T(8)
UGBE2501MA	-/P 3/5 C=45 L=75	UGCR2501	REPNSP2001	S101051000J	UGBC20 / P	UGBC205 / P	UGBE200AR	-	REPNS250	S151051000J
UGBE2501SA	-/P 3/5 C=45 L=77	UGCR2501	REPNSP2001	S101051000J	UGBC20 / P	UGBC205 / P	UGBE200AR	UGAS2623	REPNS250	S151051000J
UGBE2502MA	-/P 3/5 C=60 L=90	UGCR2502	REPNSP2002	S101051000J	UGBC20 / P	UGBC205 / P	UGBE200AR	-	REPNS250	S151051000J
UGBE2502SA	-/P 3/5 C=60 L=92	UGCR2502	REPNSP2002	S101051000J	UGBC20 / P	UGBC205 / P	UGBE200AR	UGAS2623	REPNS250	S151051000J
UGBE2503MA	-/P 3/5 C=80 L=110	UGCR2503	REPNSP2003	S101051000J	UGBC20 / P	UGBC205 / P	UGBE200AR	-	REPNS250	S151051000J
UGBE2503SA	-/P 3/5 C=80 L=112	UGCR2503	REPNSP2003	S101051000J	UGBC20 / P	UGBC205 / P	UGBE200AR	UGAS2623	REPNS250	S151051000J
UGBE2504MA	-/P 3/5 C=100 L=130	UGCR2504	REPNSP2004	S101551000J	UGBC20 / P	UGBC205 / P	UGBE200AR	-	REPNS250	S151051000J
UGBE2504SA	-/P 3/5 C=100 L=132	UGCR2504	REPNSP2004	S101551000J	UGBC20 / P	UGBC205 / P	UGBE200AR	UGAS2623	REPNS250	S151051000J

INJECTION VESTIGE: T1 HEATED HEAD OPEN FLOW NOZZLES - YES: injection on sprues - YES: parts when the gate vestige look is not that critical - YES: intense colours, colour change and abrasive reinforcements - YES: Single and Multi-cavity applications - NO: plastics leaving stringings/droolings while mould opens; in such instance you can use EP-TR type nozzles - T2B/T2BP injection vestige.

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Head nozzle coil heater
- T(2) = Body nozzle J thermocouple
- 3 = Bushing
- 3/P = Bushing with machinable prolongation
- 5 = Copper ring
- 6 = Centering Ring
- 8 = Head nozzle coil heater (REPNS250)
- T(8)=Head nozzle J Thermocouple (S151051000J)

- ØC = Standard: 4 - On request: 5
- Ød = Standard: 1,2-1,5-2,0
- P = Standard: 10 - On request: 0,5 - 9,9
- O-RING On request

