Hot runner manifolds model CCLDR2DQ-02T

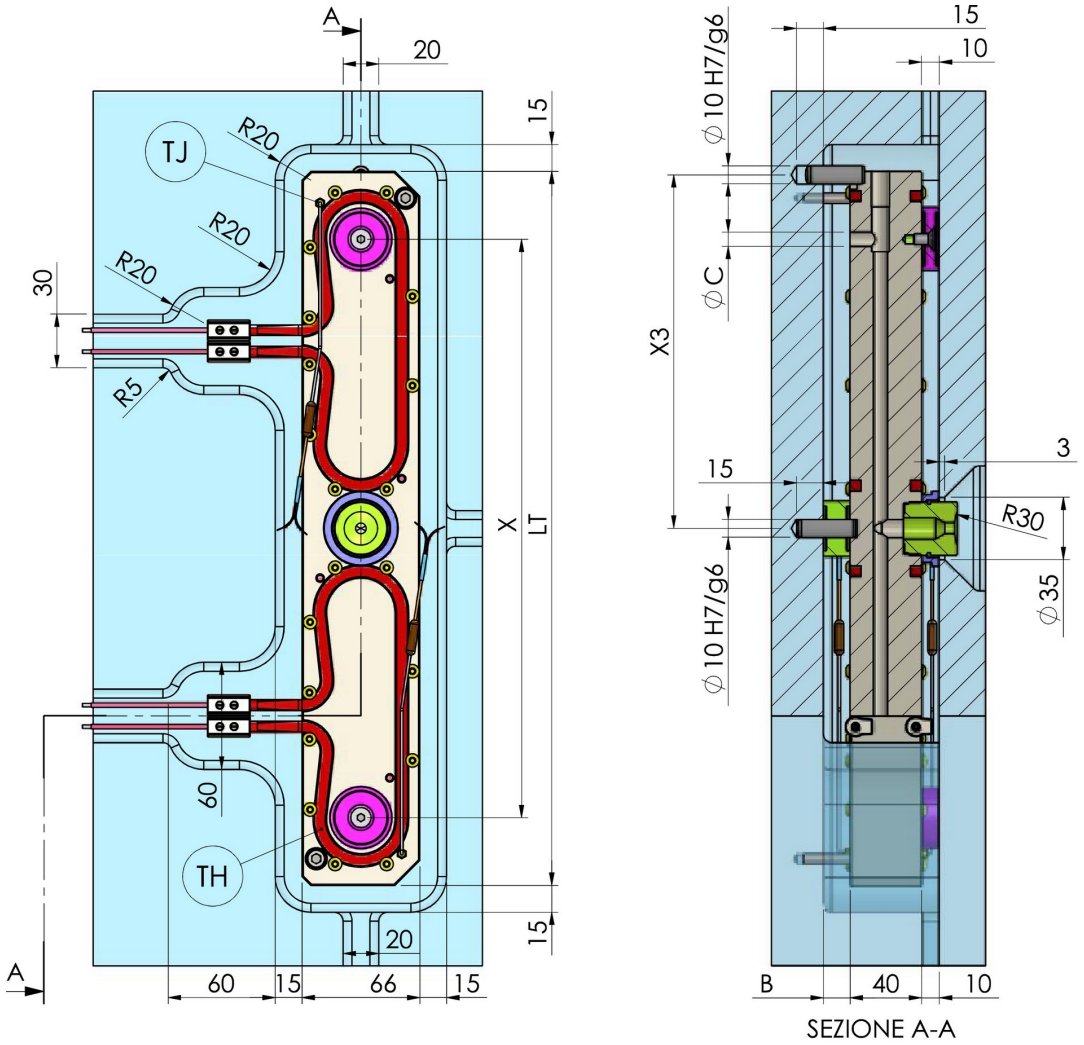

Code	LT	X3	X min	X max	TJ	TH (x 4pcs.)	ØC
CCLDR2DQT02040	400	198	>=90	<=324	SF151551000J	REQ50604500750T	5-6-7-8-9-10-11-12
CCLDR2DQT02050	500	248	>324	<=424	SF151551000J	REQ50605500900T	5-6-7-8-9-10-11-12
CCLDR2DQT02060	600	298	>424	<=524	SF151551000J	REQ50606501100T	5-6-7-8-9-10-11-12
CCLDR2DQT02070	700	348	>524	<=624	SF151551000J	REQ50607501300T	5-6-7-8-9-10-11-12
CCLDR2DQT02080	800	398	>624	<=724	SF151551000J	REQ50608501450T	5-6-7-8-9-10-11-12
CCLDR2DQT02090	900	448	>724	<=824	SF151551000J	REQ50609501650T	5-6-7-8-9-10-11-12
CCLDR2DQT02100	1000	498	>824	<=924	SF151551000J	REQ50610501850T	5-6-7-8-9-10-11-12

Hot runner manifold with: No.2 aligned drops and double heater circuit (No.2 heaters on injection bushing side, No.2 heaters on nozzle side)

No.2 drops aligned - No. 2+2 heaters
TH = Armoured tubular heater 6 x 6 mm
TJ = J-type thermocouple with M4 fixing device
B = Min. 10 mm.(variable depending on the height of the nozzle head)
NOTE : X distances calculated for the heads of the nozzle Ø26

@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it