
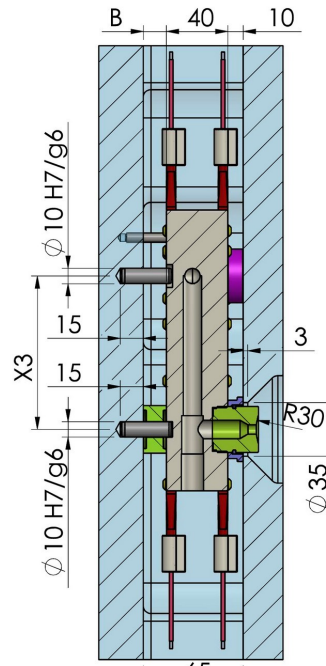


SEZIONE A-A

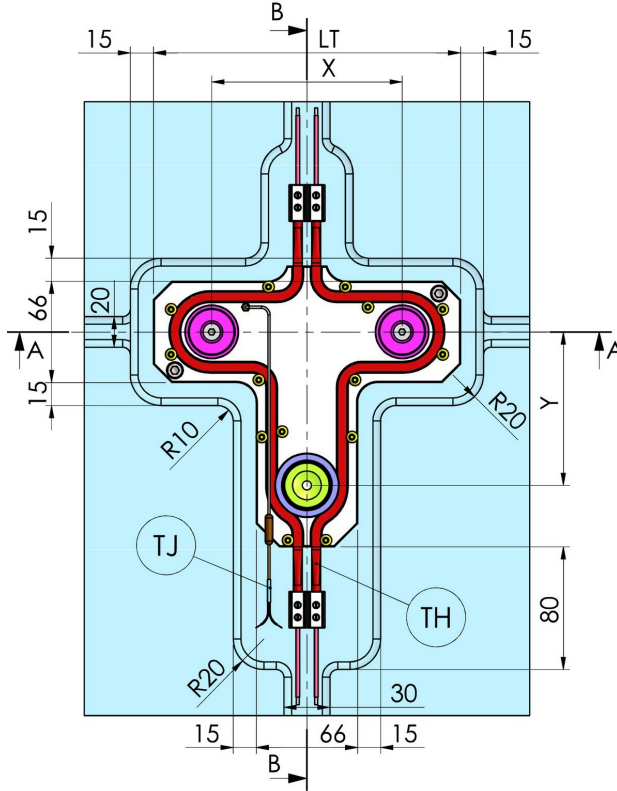

SEZIONE B-B

Code	Y*	LT	X3	X min - max	TJ	TH (x 4pcs.)	ØC
CCLF2DQT02020	05/10/15/20/25/30/35	200	TEC	>=27 <=124	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02025	05/10/15/20/25/30/35	250	TEC	>124 <=174	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02030	05/10/15/20/25/30/35	300	TEC	>174 <=224	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02035	05/10/15/20/25/30/35	350	TEC	>224 <=274	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02040	05/10/15/20/25/30/35	400	TEC	>274 <=324	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02045	05/10/15/20/25/30/35	450	TEC	>324 <=374	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02050	05/10/15/20/25/30/35	500	TEC	>374 <=424	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02055	05/10/15/20/25/30/35	550	TEC	>424 <=474	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02060	05/10/15/20/25/30/35	600	TEC	>474 <=524	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02065	05/10/15/20/25/30/35	650	TEC	>524 <=574	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02070	05/10/15/20/25/30/35	700	TEC	>574 <=624	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02075	05/10/15/20/25/30/35	750	TEC	>624 <=674	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10
CCLF2DQT02080	05/10/15/20/25/30/35	800	TEC	>674 <=724	SF151551000J	REQ506 SV W DIS	5-6-7-8-9-10

Hot runner manifold with: No.2 aligned drops, offset sprue bushing and double heater circuit (No.2 heaters on injection bushing side, No.2 heaters on nozzle side)

No.2 drops aligned, offset sprue bushing
 No.2+2 heaters
 Y=05 (5÷50mm)
 Y=10 (51÷100mm)
 Y=15 (101÷150mm)
 Y=20 (151÷200mm)
 Y=25 (201÷250mm)
 Y=30 (251÷300mm)
 Y=35 (301÷350mm)

TH = Armoured tubular heater 6 x 6 mm
 TJ = J-type thermocouple with M4 fixing device
 B = Min. 10 mm. (variable depending on the height of the nozzle head)
 NOTE : centres for nozzle head of Ø26
 TEC = Please ask EMP Technical Office