


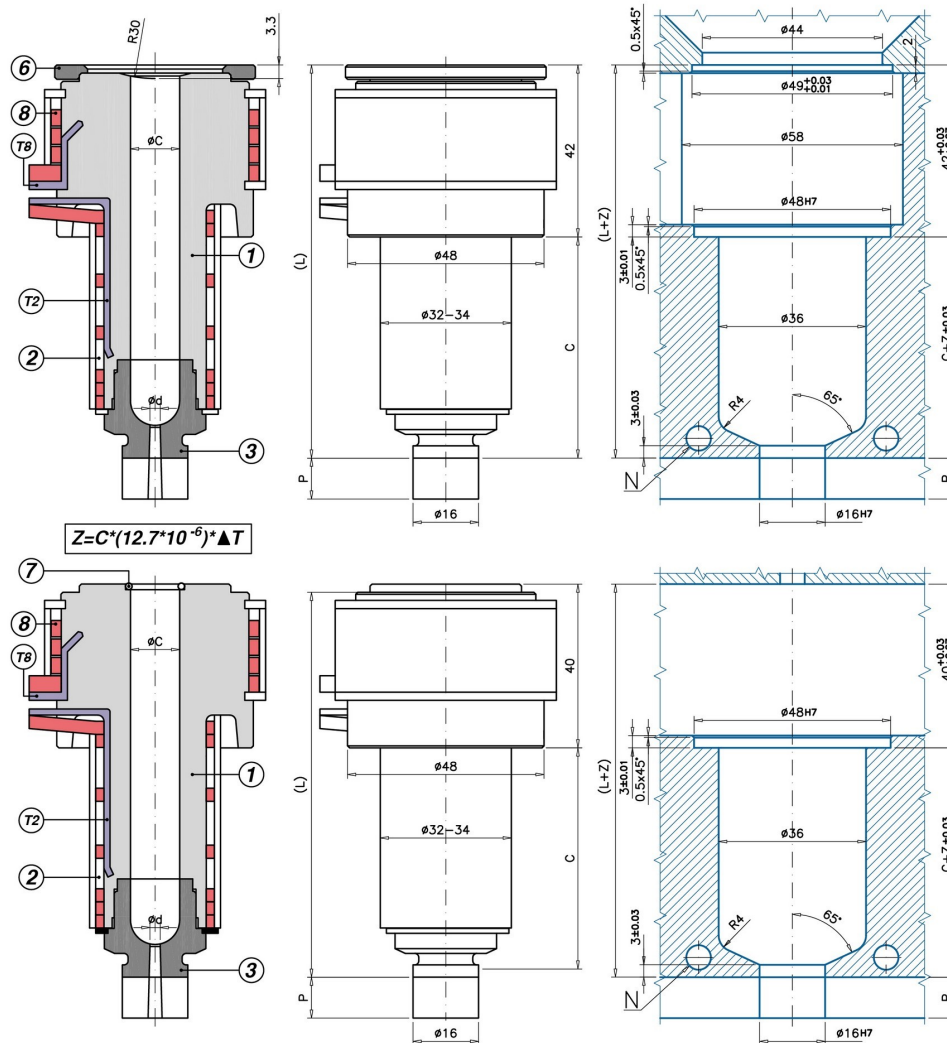

Code		C - L	1	2	T(2)	3 a 3° (-/P)	3 a 5° (-/P)	6	7
UGBE5501MA	-IP 3/5	C=54 L=94	UGCR5501M	REPNSP5001	S151051000J	UGBC50/P	UGBC505/P	-	UGACOR14
UGBE5501SA	-IP 3/5	C=54 L=96	UGCR5501S	REPNSP5001	S151051000J	UGBC50/P	UGBC505/P	UGAS4937	-
UGBE5502MA	-IP 3/5	C=84 L=124	UGCR5502M	REPNSP5002	S151051000J	UGBC50/P	UGBC505/P	-	UGACOR14
UGBE5502SA	-IP 3/5	C=84 L=126	UGCR5502S	REPNSP5002	S151051000J	UGBC50/P	UGBC505/P	UGAS4937	-
UGBE5503MA	-IP 3/5	C=114 L=154	UGCR5503M	REPNSP5003	S151551000J	UGBC50/P	UGBC505/P	-	UGACOR14
UGBE5503SA	-IP 3/5	C=114 L=156	UGCR5503S	REPNSP5003	S151551000J	UGBC50/P	UGBC505/P	UGAS4937	-
UGBE5504MA	-IP 3/5	C=164 L=204	UGCR5504M	REPNSP5004	S152051000J	UGBC50/P	UGBC505/P	-	UGACOR14
UGBE5504SA	-IP 3/5	C=164 L=206	UGCR5504S	REPNSP5004	S152051000J	UGBC50/P	UGBC505/P	UGAS4937	-
UGBE5505MA	-IP 3/5	C=214 L=254	UGCR5505M	REPNSP5005	S152551000J	UGBC50/P	UGBC505/P	-	UGACOR14
UGBE5505SA	-IP 3/5	C=214 L=256	UGCR5505S	REPNSP5005	S152551000J	UGBC50/P	UGBC505/P	UGAS4937	-

INJECTION VESTIGE: T1 HEATED HEAD OPEN FLOW NOZZLES - YES: injection on sprues - YES: parts when the gate vestige look is not that critical - YES: intense colours, colour change and abrasive reinforcements - YES: Single and Multi-cavity applications - NO: plastics leaving stringings/droolings while mould opens; in such instance you can use EP-TR type nozzles - T2B/T2BP injection vestige.

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
 2= Head nozzle coil heater
 T(2) = Body nozzle J thermocouple
 3 = Bushing
 3/P = Bushing with machinable prolongation
 5 = Copper ring
 6 = Centering Ring
 8 = Head nozzle coil heater (REPNS550)
 T(8)=Head nozzle J Thermocouple (S151051000J)
 7 = O-RING

ØC = Standard 12 - On request: 13
 Ød = Standard: 1,2-1,5-2,0-2,5-3,0-3,5-4,0-5,0-6,0
 P = Standard: 25 - On request: 0,5 ÷ 24,9

