


**S** Single Cavity Application

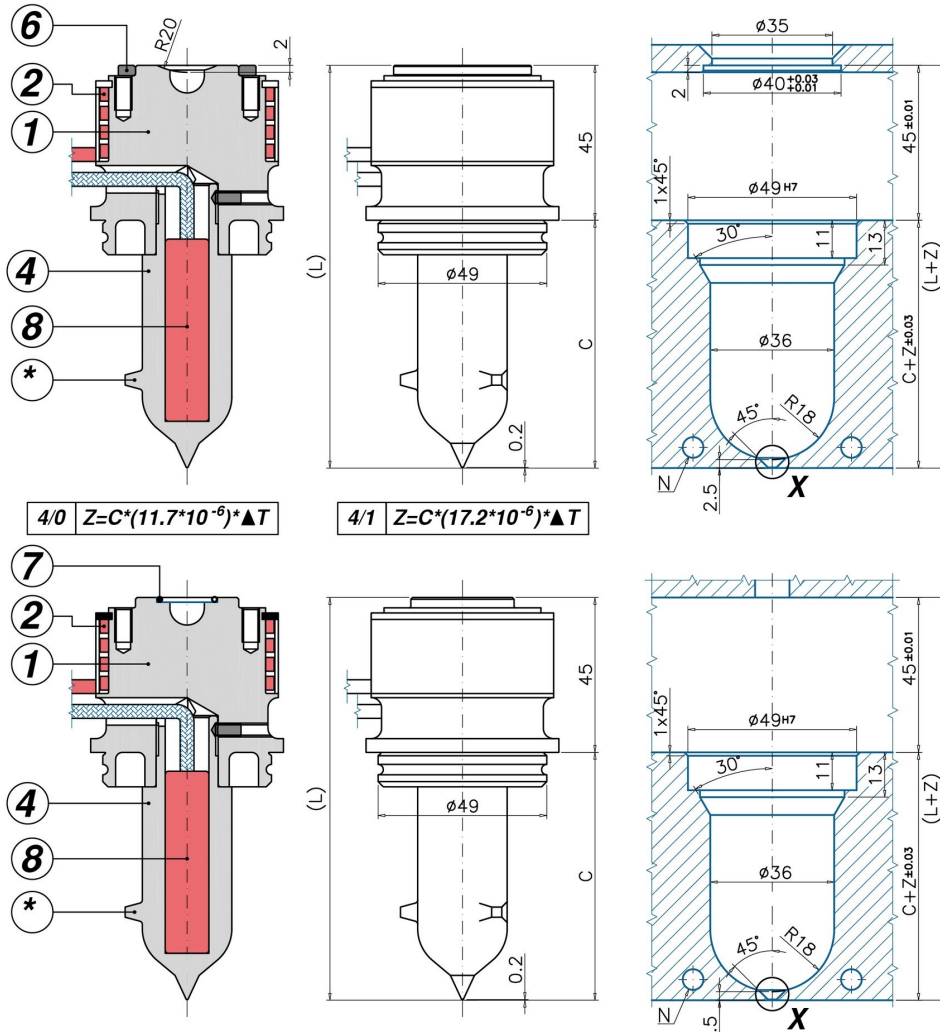

**M** MultiCavity Application

Code	0/1	C - L	1	2	4/0	4/1	6	7	8
UGGS5510M	0/1	C=60 L=105	UGCRG55	REPTS550	UGPG5010	UGPG5110	-	UGACOR14	1270051B0400X
UGGS5510S	0/1	C=60 L=105	UGCRG55	REPTS550	UGPG5010	UGPG5110	UGAS4030	-	1270051B0400X
UGGS5520M	0/1	C=72 L=117	UGCRG55	REPTS550	UGPG5020	UGPG5120	-	UGACOR14	1270064B0400X
UGGS5520S	0/1	C=72 L=117	UGCRG55	REPTS550	UGPG5020	UGPG5120	UGAS4030	-	1270064B0400X
UGGS5530M	0/1	C=84 L=129	UGCRG55	REPTS550	UGPG5030	UGPG5130	-	UGACOR14	1270076B0400X
UGGS5530S	0/1	C=84 L=129	UGCRG55	REPTS550	UGPG5030	UGPG5130	UGAS4030	-	1270076B0400X
UGGS5540M	0/1	C=97 L=142	UGCRG55	REPTS550	UGPG5040	UGPG5140	-	UGACOR14	1270089B0500X
UGGS5540S	0/1	C=97 L=142	UGCRG55	REPTS550	UGPG5040	UGPG5140	UGAS4030	-	1270089B0500X

INJECTION VESTIGE: T2 DIRECT INJECTION TORPEDO NOZZLES WITH HEATED HEAD - YES: Minimum injection vestige - YES: plastics that leave stringings/droolings while mould opens - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE AND MULTY-CAVITY applications - NO: colour change

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2 = Coil heater with J-type thermocouple
- 4/0 = Tempered steel torpedo
- 4/1 = Cu-Be torpedo
- 6 = Centering Ring
- 7 = O-Ring
- 8 = Cartridge heater with J type TC
- Ød= Standard : 1,5 ÷ 2,0
- Centering on request

