ER model nozzles series 3050

S Single Cavity Application

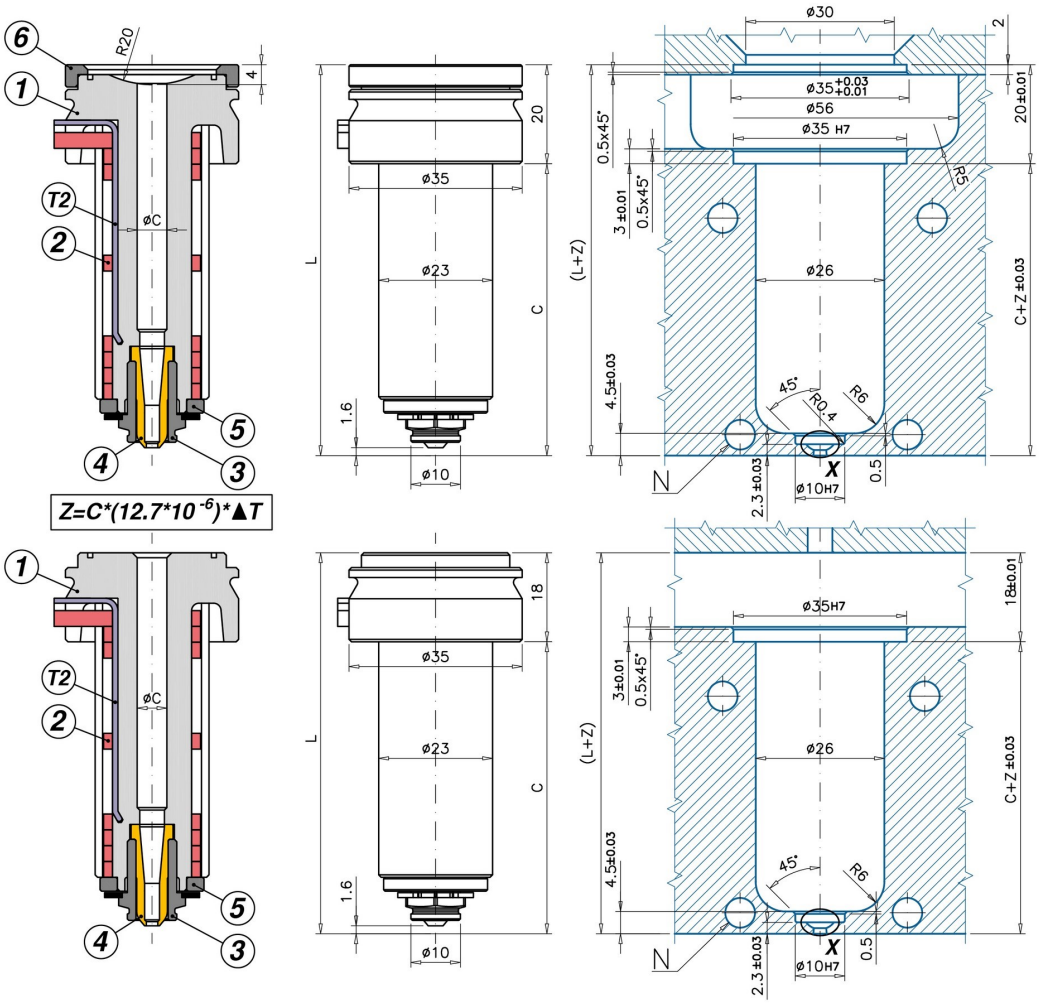

M MultiCavity Application

Codice		C - L	1	2	T(2)	3	4/0 - 4/1		5	6
UGER3051MA	**0/1**	C=59 L=77	UGCR3001M	REPNSP3001	S151051000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3051SA	**0/1**	C=59 L=79	UGCR3001S	REPNSP3001	S151051000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530
UGER3052MA	**0/1**	C=89 L=107	UGCR3002M	REPNSP3002	S151551000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3052SA	**0/1**	C=89 L=109	UGCR3002S	REPNSP3002	S151551000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530
UGER3053MA	**0/1**	C=119 L=137	UGCR3003M	REPNSP3003	S151551000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3053SA	**0/1**	C=119 L=139	UGCR3003S	REPNSP3003	S151551000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530
UGER3054MA	**0/1**	C=159 L=177	UGCR3004M	REPNSP3004	S152051000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3054SA	**0/1**	C=159 L=179	UGCR3004S	REPNSP3004	S152051000J	UGBC310	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530

INJECTION VESTIGE: T3 NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for plastics with melting temperature higher than 250°C

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
3= Open bushing
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
5 = Copper ring
6 = Centering ring
ØC = Standard : 6 - On request: 7
Ød = standard: 0,6÷2,0
O-RING on request





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it