


## S Single Cavity Application

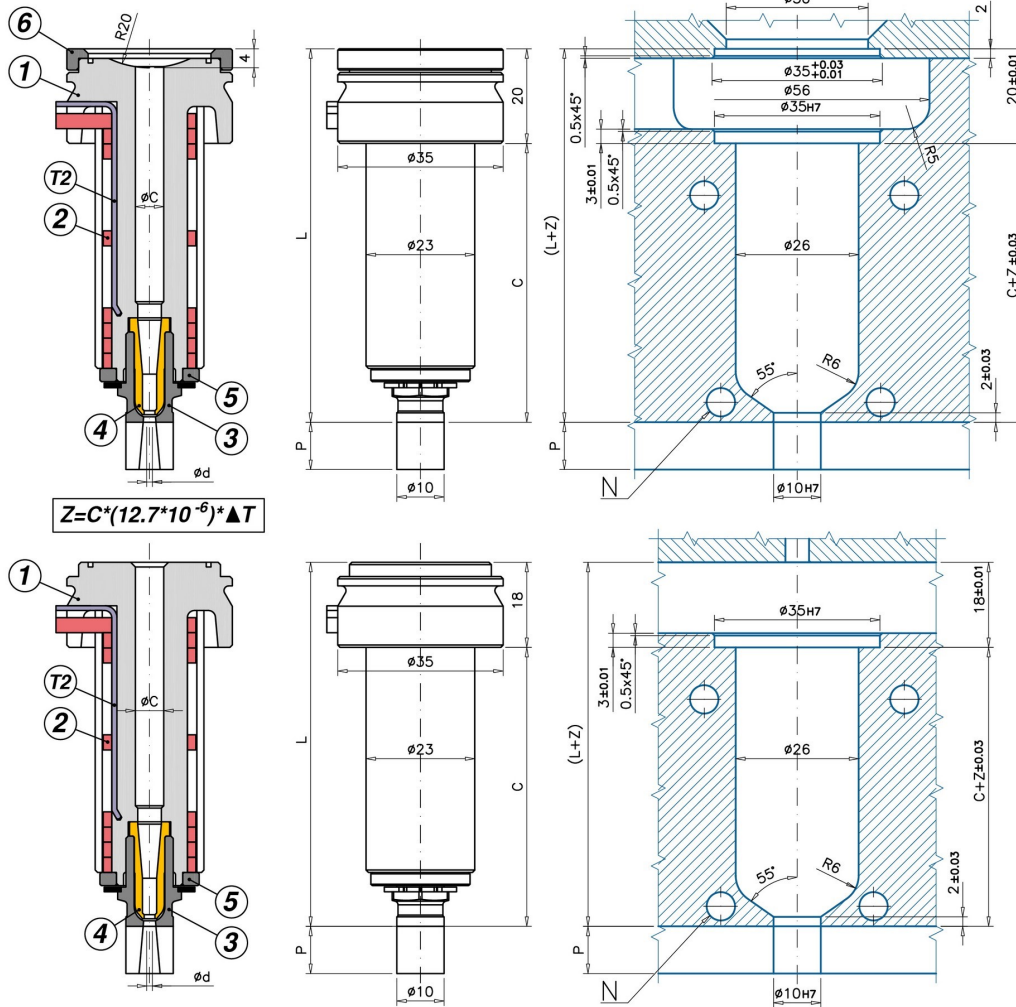

## M MultiCavity Application

Code	C - L	1	2	T(2)	3 - 3/P	4/0 - 4/1	5	6			
UGER3151MA	-/P 0/1	C=59 L=77	UGCR3001M	REPNSP3001	S151051000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3151SA	-/P 0/1	C=59 L=79	UGCR3001S	REPNSP3001	S151051000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530
UGER3152MA	-/P 0/1	C=89 L=107	UGCR3002M	REPNSP3002	S151551000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3152SA	-/P 0/1	C=89 L=109	UGCR3002S	REPNSP3002	S151551000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530
UGER3153MA	-/P 0/1	C=119 L=137	UGCR3003M	REPNSP3003	S151551000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3153SA	-/P 0/1	C=119 L=139	UGCR3003S	REPNSP3003	S151551000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530
UGER3154MA	-/P 0/1	C=159 L=177	UGCR3004M	REPNSP3004	S102051000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	-
UGER3154SA	-/P 0/1	C=159 L=179	UGCR3004S	REPNSP3004	S102051000J	UGBC313	UGBC313P	UGPU325TZ	UGPU325CU	UGBE300AR	UGAS3530

INJECTION VESTIGE: T3B / T3BP NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for thermoplastic materials with melting temperature higher than 250°C

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3 = Closed bushing
- (Ød = standard: 0,6-0,8-1,0-1,2-1,5-2,0)
- 3/P = Bushing with machinable prolongation
- (Ød = standard: 1,2-1,5-2,0)
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 5 = Copper ring
- 6 = Centering ring

ØC = Standard : 6 - On request: 7  
P = standard: 20 - On request: 0,5 ÷ 19,9  
O-RING on request

