S Single Cavity Application

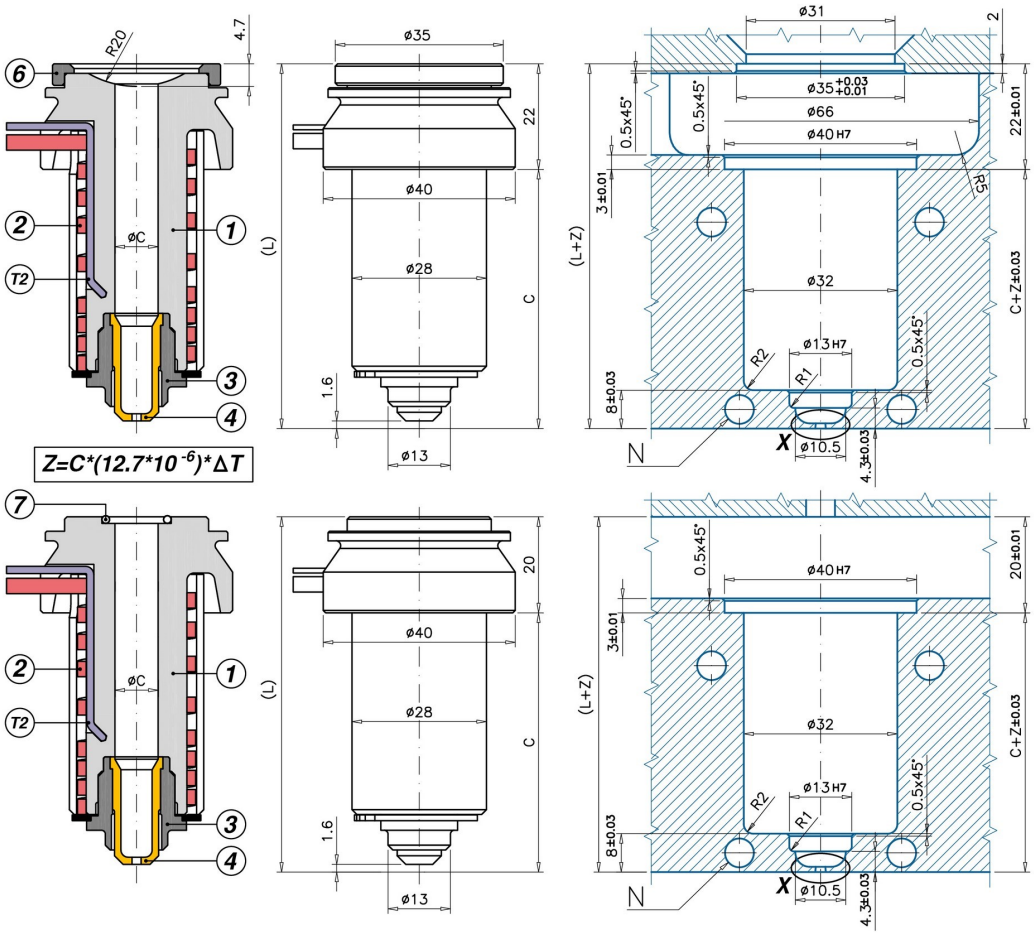

M MultiCavity Application

Code		C - L	1	2	T(2)	3	4/0 - 4/1		6	7
UGER4001MA	**0/1**	C=54 L=74	UGCR4001M	REPNSP4001	S151051000J	UGBC440	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4001SA	**0/1**	C=54 L=76	UGCR4001S	REPNSP4001	S151051000J	UGBC440	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4002MA	**0/1**	C=84 L=104	UGCR4002M	REPNSP4002	S151051000J	UGBC440	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4002SA	**0/1**	C=84 L=106	UGCR4002S	REPNSP4002	S151051000J	UGBC440	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4003MA	**0/1**	C=114 L=134	UGCR4003M	REPNSP4003	S151551000J	UGBC440	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4003SA	**0/1**	C=114 L=136	UGCR4003S	REPNSP4003	S151551000J	UGBC440	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4004MA	**0/1**	C=164 L=184	UGCR4004M	REPNSP4004	S152051000J	UGBC440	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4004SA	**0/1**	C=164 L=186	UGCR4004S	REPNSP4004	S152051000J	UGBC440	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4005MA	**0/1**	C=214 L=234	UGCR4005M	REPNSP4005	S152551000J	UGBC440	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4005SA	**0/1**	C=214 L=236	UGCR4005S	REPNSP4005	S152551000J	UGBC440	UGPU43TZ	UGPU43CU	UGAS3530	-

INJECTION VESTIGE: T3 NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for plastics with melting temperature higher than 250°C

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
3= Open bushing
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
6 = Centering ring
7 = O-RING
ØC = Standard: 9 - On request: 10
Ød = standard: 1,0÷3,3





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it