S Single Cavity Application

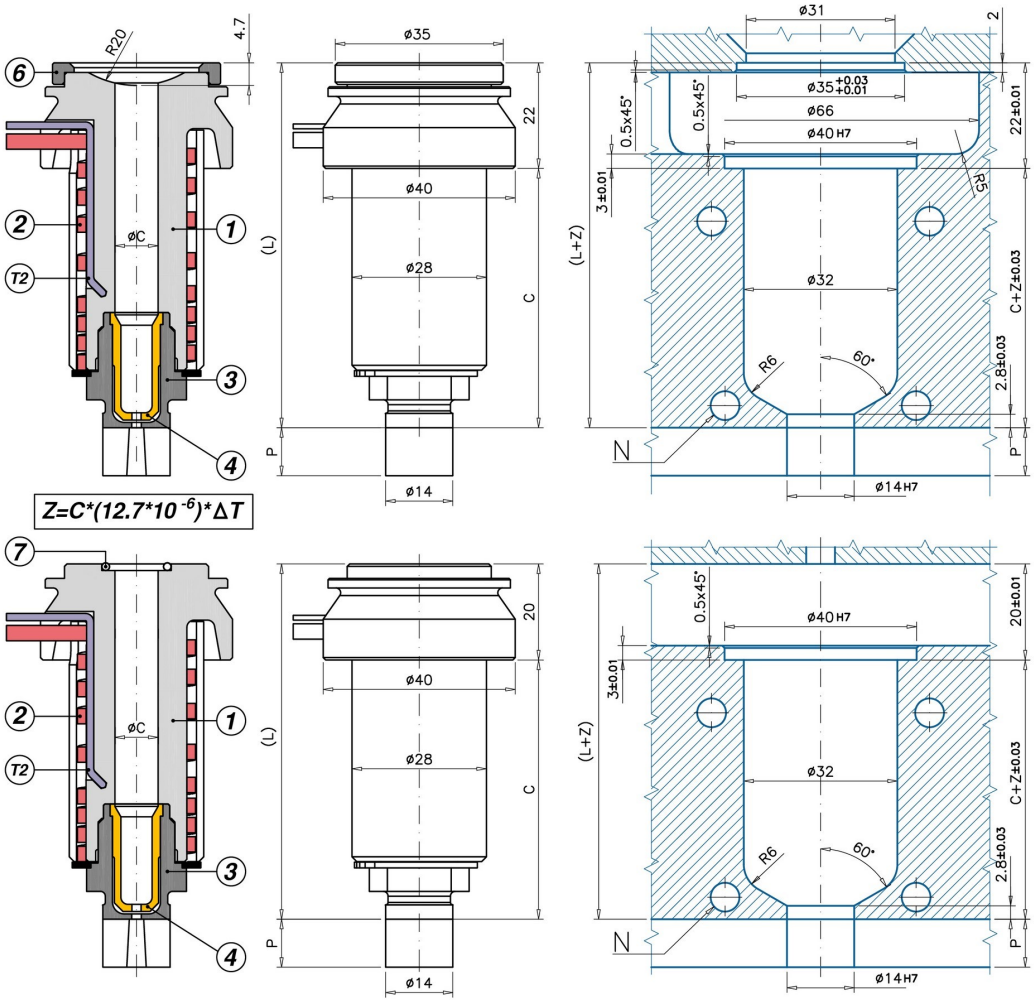

M MultiCavity Application

Code		C - L	1	2	T(2)	3 - 3/P		4/0 - 4/1		6	7
UGER4101MA	**-/P 0/1**	C=54 L=74	UGCR4001M	REPNSP4001	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4101SA	**-/P 0/1**	C=54 L=76	UGCR4001S	REPNSP4001	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4102MA	**-/P 0/1**	C=84 L=104	UGCR4002M	REPNSP4002	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4102SA	**-/P 0/1**	C=84 L=106	UGCR4002S	REPNSP4002	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4103MA	**-/P 0/1**	C=114 L=134	UGCR4003M	REPNSP4003	S151551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4103SA	**-/P 0/1**	C=114 L=136	UGCR4003S	REPNSP4003	S151551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4104MA	**-/P 0/1**	C=164 L=184	UGCR4004M	REPNSP4004	S152051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4104SA	**-/P 0/1**	C=164 L=186	UGCR4004S	REPNSP4004	S152051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-
UGER4105MA	**-/P 0/1**	C=214 L=234	UGCR4005M	REPNSP4005	S152551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11
UGER4105SA	**-/P 0/1**	C=214 L=236	UGCR4005S	REPNSP4005	S152551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-

INJECTION VESTIGE: T3B / T3BP NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for thermoplastic materials with melting temperature higher than 250°C

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
3 = Closed bushing
(Ød = standard: 1,0-1,2-1,5-2,0-2,5-3,0)
3/P = Bushing with machinable prolungation
(Ød = standard: 1,2-1,5-2,0-2,5-3,0)
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
6 = Centering ring
7 = O-RING

ØC = Standard : 9 - On request: 10
P = standard: 25 - On request: 0,5 ÷ 24.9





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it