


**S** Single Cavity Application

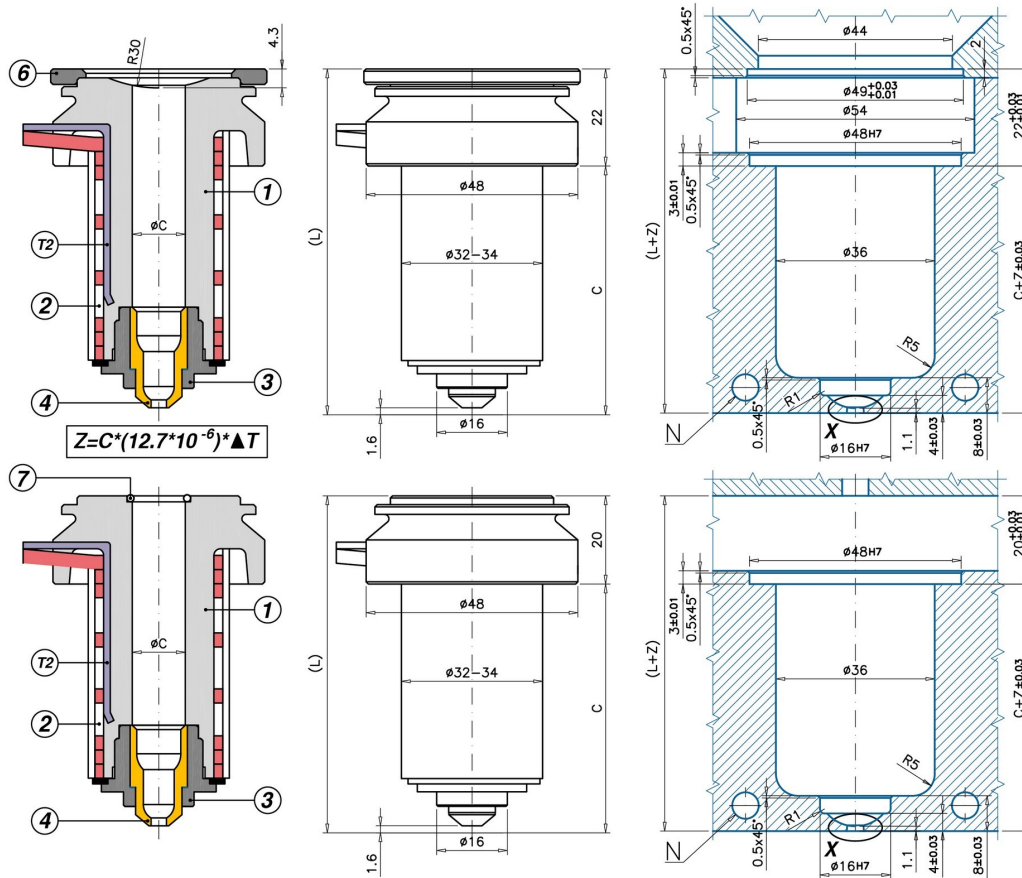

**M** MultiCavity Application

Code	C - L	1	2	T(2)	3	4/0 - 4/1	6	7
UGER5001MA	0/1 C=54 L=74	UGCR5001M	REPNSP5001	S151051000J	UGBC540	UGPU53TZ UGPU53CU	-	UGACOR14
UGER5001SA	0/1 C=54 L=76	UGCR5001S	REPNSP5001	S151051000J	UGBC540	UGPU53TZ UGPU53CU	UGAS4937	-
UGER5002MA	0/1 C=84 L=104	UGCR5002M	REPNSP5002	S151051000J	UGBC540	UGPU53TZ UGPU53CU	-	UGACOR14
UGER5002SA	0/1 C=84 L=106	UGCR5002S	REPNSP5002	S151051000J	UGBC540	UGPU53TZ UGPU53CU	UGAS4937	-
UGER5003MA	0/1 C=114 L=134	UGCR5003M	REPNSP5003	S151551000J	UGBC540	UGPU53TZ UGPU53CU	-	UGACOR14
UGER5003SA	0/1 C=114 L=136	UGCR5003S	REPNSP5003	S151551000J	UGBC540	UGPU53TZ UGPU53CU	UGAS4937	-
UGER5004MA	0/1 C=164 L=184	UGCR5004M	REPNSP5004	S152051000J	UGBC540	UGPU53TZ UGPU53CU	-	UGACOR14
UGER5004SA	0/1 C=164 L=186	UGCR5004S	REPNSP5004	S152051000J	UGBC540	UGPU53TZ UGPU53CU	UGAS4937	-
UGER5005MA	0/1 C=214 L=234	UGCR5005M	REPNSP5005	S152551000J	UGBC540	UGPU53TZ UGPU53CU	-	UGACOR14
UGER5005SA	0/1 C=214 L=236	UGCR5005S	REPNSP5005	S152551000J	UGBC540	UGPU53TZ UGPU53CU	UGAS4937	-

INJECTION VESTIGE: T3 NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for plastics with melting temperature higher than 250°C

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3= Open bushing
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING
- ØC = Standard: 9 - On request: 10
- Ød = standard: 1,0÷3,3

