ER model nozzles series 5100

S Single Cavity Application

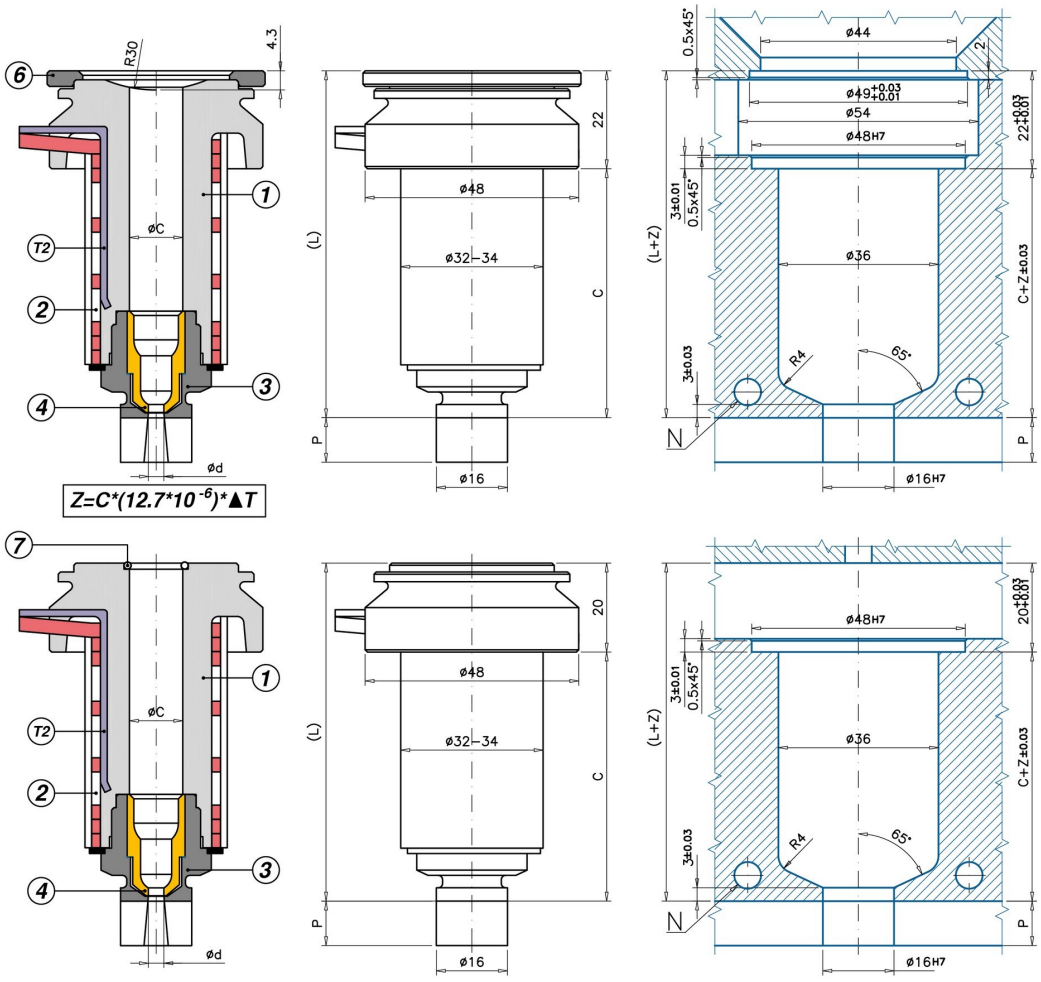

M MultiCavity Application

Code		C - L	1	2	T(2)	3 - 3/P		4/0 - 4/1		6	7
UGER5101MA	**-/P 0/1**	C=54 L=74	UGCR5001M	REPNSP5001	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5101SA	**-/P 0/1**	C=54 L=76	UGCR5001S	REPNSP5001	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5102MA	**-/P 0/1**	C=84 L=104	UGCR5002M	REPNSP5002	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5102SA	**-/P 0/1**	C=84 L=106	UGCR5002S	REPNSP5002	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5103MA	**-/P 0/1**	C=114 L=134	UGCR5003M	REPNSP5003	S151551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5103SA	**-/P 0/1**	C=114 L=136	UGCR5003S	REPNSP5003	S151551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5104MA	**-/P 0/1**	C=164 L=184	UGCR5004M	REPNSP5004	S152051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5104SA	**-/P 0/1**	C=164 L=186	UGCR5004S	REPNSP5004	S152051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5105MA	**-/P 0/1**	C=214 L=234	UGCR5005M	REPNSP5005	S152551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5105SA	**-/P 0/1**	C=214 L=236	UGCR5005S	REPNSP5005	S152551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-

INJECTION VESTIGE: T3B / T3BP NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for thermoplastic materials with melting temperature higher than 250°C

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2 = Coil heater
T(2) = J thermocouple
3 = Closed bushing
(Ød = standard: 1,0-1,2-1,5-2,0-2,5-3,0-3,5)
3/P = Bushing with machinable prolungation
(Ød = standard: 1,2-1,5-2,0-2,5-3,0-3,5)
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
6 = Centering ring
7 = O-RING

ØC = Standard : 12 - On request: 13
P = standard: 25 - On request: 0,5 ÷ 24.9





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it