


S Single Cavity Application

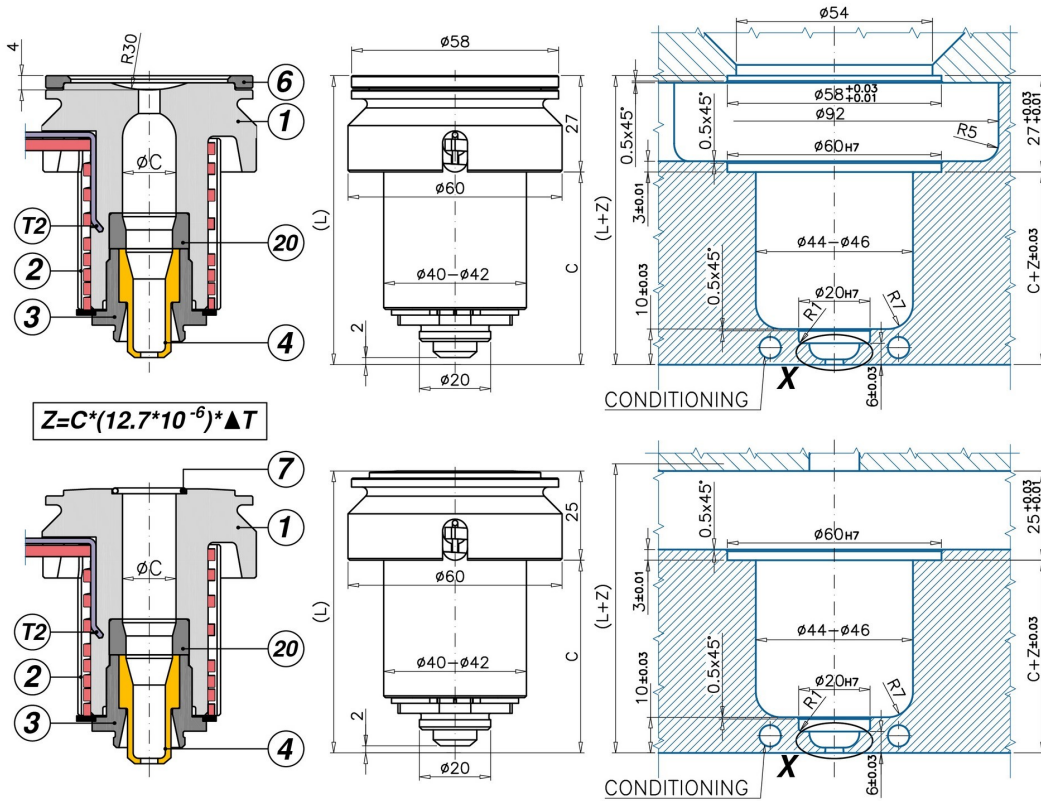

M MultiCavity Application

Code	C - L	1	2	T(2)	3	4/0 - 4/1	6	7
UGER6002MA	0/1 C=54 L=79	UGCR6002M	REPNSP6002	S151051000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6002SA	0/1 C=54 L=81	UGCR6002S	REPNSP6002	S151051000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6003MA	0/1 C=74 L=99	UGCR6003M	REPNSP6003	S151551000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6003SA	0/1 C=74 L=101	UGCR6003S	REPNSP6003	S151551000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6004MA	0/1 C=94 L=119	UGCR6004M	REPNSP6004	S151551000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6004SA	0/1 C=94 L=121	UGCR6004S	REPNSP6004	S151551000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6005MA	0/1 C=114 L=139	UGCR6005M	REPNSP6005	S151551000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6005SA	0/1 C=114 L=141	UGCR6005S	REPNSP6005	S151551000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6007MA	0/1 C=164 L=189	UGCR6007M	REPNSP6007	S152051000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6007SA	0/1 C=164 L=191	UGCR6007S	REPNSP6007	S152051000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-

INJECTION VESTIGE: T3 NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - NO: plastics that leave stringings / droolings while mould opens - NO: SINGLE CAVITY applications, for plastics with melting temperature higher than 250°C

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3= Open bushing
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING
- ØC = Standard: 9 - On request: 10
- Ød = standard: 1,0÷3,3

