


S Single Cavity Application

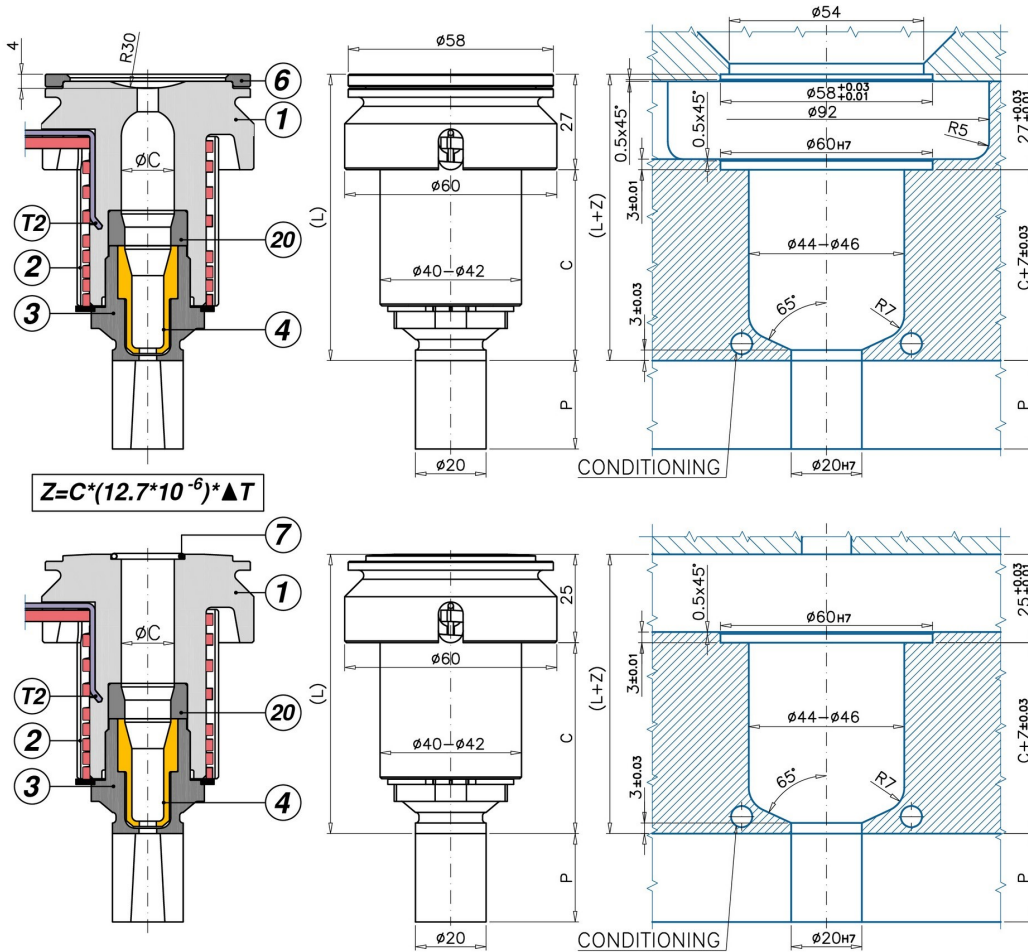

$$Z = C * (12.7 * 10^{-6}) * \Delta T$$

M MultiCavity Application

Code	C - L	1	2	T(2)	3 - 3/P	4/0 - 4/1	6	7
UGER6102MA	-P 0/1 C=54 L=79	UGCR6002M	REPNSP6002	S151051000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	-	UGACOR17
UGER6102SA	-P 0/1 C=54 L=81	UGCR6002S	REPNSP6002	S151051000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	UGAS5848	-
UGER6103MA	-P 0/1 C=74 L=99	UGCR6003M	REPNSP6003	S151551000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	-	UGACOR17
UGER6103SA	-P 0/1 C=74 L=101	UGCR6003S	REPNSP6003	S151551000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	UGAS5848	-
UGER6104MA	-P 0/1 C=94 L=119	UGCR6004M	REPNSP6004	S151551000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	-	UGACOR17
UGER6104SA	-P 0/1 C=94 L=121	UGCR6004S	REPNSP6004	S151551000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	UGAS5848	-
UGER6105MA	-P 0/1 C=114 L=139	UGCR6005M	REPNSP6005	S151551000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	-	UGACOR17
UGER6105SA	-P 0/1 C=114 L=141	UGCR6005S	REPNSP6005	S151551000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	UGAS5848	-
UGER6107MA	-P 0/1 C=164 L=189	UGCR6007M	REPNSP6007	S152051000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	-	UGACOR17
UGER6107SA	-P 0/1 C=164 L=191	UGCR6007S	REPNSP6007	S152051000J	UGBC63	UGBC63P UGPU63TZ UGPU63CU	UGAS5848	-

INJECTION VESTIGE: T3B / T3BP NOZZLES FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). YES - frequent color change YES - intense colours YES - abrasive reinforcements (choose the 4/0 tip) NO - plastics that leave stringings / droolings while mould opens NO - SINGLE CAVITY applications, for thermoplastic materials with melting temperature higher than 250°C

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3 = Closed bushing
- (Ød = standard: 1,0-1,2-1,5-2,0-2,5-3,0-3,5-4,0)
- 3/P = Bushing with machinable prolongation
- (Ød = standard: 1,2-1,5-2,0-2,5-3,0-3,5-4,0)
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING

øC = Standard : 16 - On request: 17
P = standard: 25 - On request: 0,5 ÷ 24.9

