ER-TR model nozzles series 2500

S Single Cavity Application

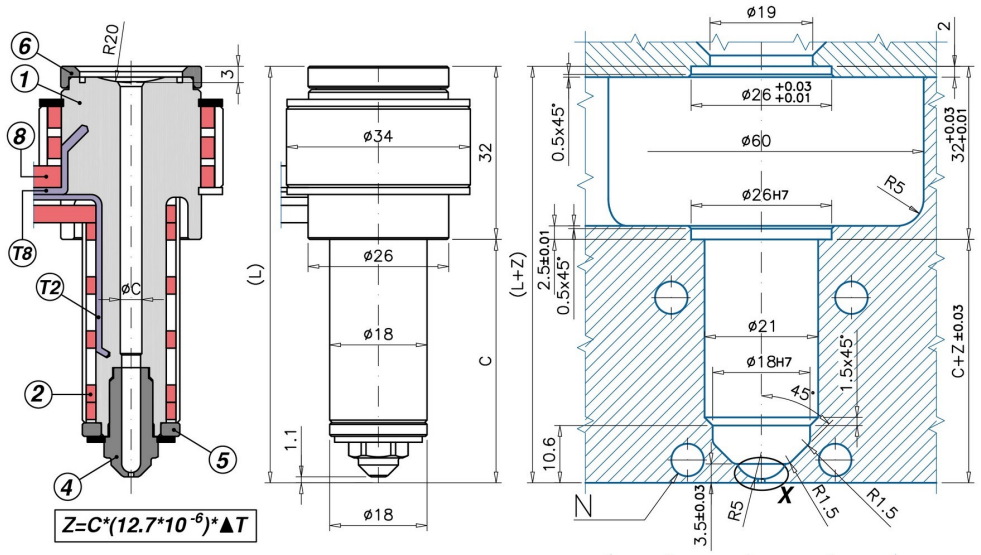

M MultiCavity Application

Code		C - L	1	2	T(2)	4/0	4/1	5	6
UGER2501MA	**0/1**	C=45 L=75	UGCR2501M	REPNSP2001	S101051000J	UGPU22TZ	UGPU22CU	UGER200AT	-
UGER2501SA	**0/1**	C=45 L=77	UGCR2501S	REPNSP2001	S101051000J	UGPU22TZ	UGPU22CU	UGER200AT	UGAS2623
UGER2502MA	**0/1**	C=60 L=90	UGCR2502M	REPNSP2002	S101051000J	UGPU22TZ	UGPU22CU	UGER200AT	-
UGER2502SA	**0/1**	C=60 L=92	UGCR2502S	REPNSP2002	S101051000J	UGPU22TZ	UGPU22CU	UGER200AT	UGAS2623
UGER2503MA	**0/1**	C=80 L=110	UGCR2503M	REPNSP2003	S101051000J	UGPU22TZ	UGPU22CU	UGER200AT	-
UGER2503SA	**0/1**	C=80 L=112	UGCR2503S	REPNSP2003	S101051000J	UGPU22TZ	UGPU22CU	UGER200AT	UGAS2623
UGER2504MA	**0/1**	C=100 L=130	UGCR2504M	REPNSP2004	S101551000J	UGPU22TZ	UGPU22CU	UGER200AT	-
UGER2504SA	**0/1**	C=100 L=132	UGCR2504S	REPNSP2004	S101551000J	UGPU22TZ	UGPU22CU	UGER200AT	UGAS2623

INJECTION VESTIGE: T3 NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
5 = Titanium ring
6 = Centering ring
8 = Head nozzle coil heater **(REPNS250)**
T(8)=Nozzle head J thermocouple **(S151051000J)**

ØC = Standard: 4 - On request: 5
Ød = Standard: 0,6÷2,0
O-RING on request



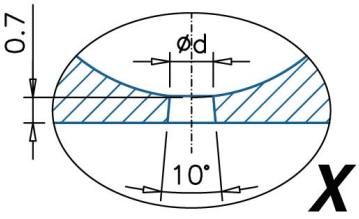

@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it