


S Single Cavity Application

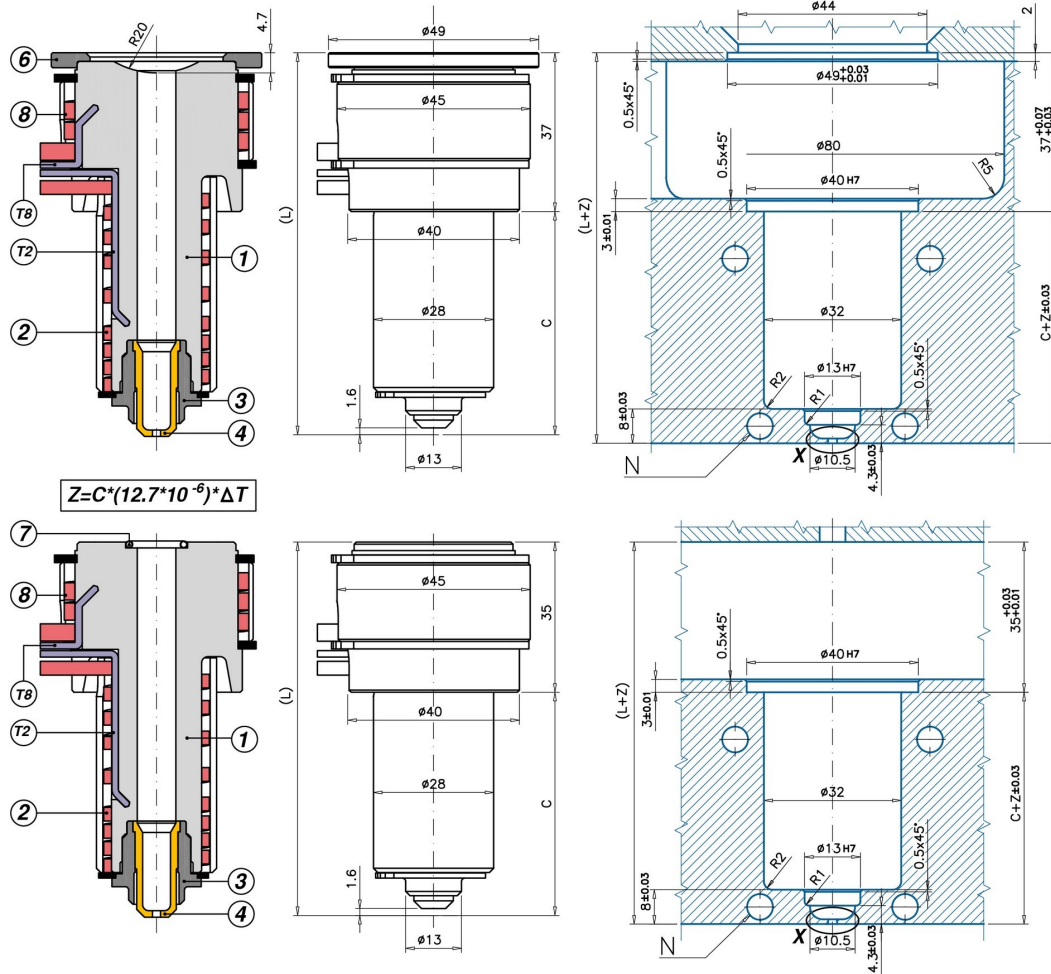

M MultiCavity Application

Code	C - L	1	2	T(2)	3	4/0 - 4/1	6	7
UGER4501MA	0/1 C=54 L=89	UGCR4501M	REPNSP4001	S151051000J	UGBC440	UGPU43TZ UGPU43CU	-	UGACOR11
UGER4501SA	0/1 C=54 L=91	UGCR4501S	REPNSP4001	S151051000J	UGBC440	UGPU43TZ UGPU43CU	UGAS3530	-
UGER4502MA	0/1 C=84 L=119	UGCR4502M	REPNSP4002	S151051000J	UGBC440	UGPU43TZ UGPU43CU	-	UGACOR11
UGER4502SA	0/1 C=84 L=121	UGCR4502S	REPNSP4002	S151051000J	UGBC440	UGPU43TZ UGPU43CU	UGAS3530	-
UGER4503MA	0/1 C=114 L=149	UGCR4503M	REPNSP4003	S151551000J	UGBC440	UGPU43TZ UGPU43CU	-	UGACOR11
UGER4503SA	0/1 C=114 L=151	UGCR4503S	REPNSP4003	S151551000J	UGBC440	UGPU43TZ UGPU43CU	UGAS3530	-
UGER4504MA	0/1 C=164 L=199	UGCR4504M	REPNSP4004	S152051000J	UGBC440	UGPU43TZ UGPU43CU	-	UGACOR11
UGER4504SA	0/1 C=164 L=201	UGCR4504S	REPNSP4004	S152051000J	UGBC440	UGPU43TZ UGPU43CU	UGAS3530	-
UGER4505MA	0/1 C=214 L=249	UGCR4505M	REPNSP4005	S152551000J	UGBC440	UGPU43TZ UGPU43CU	-	UGACOR11
UGER4505SA	0/1 C=214 L=251	UGCR4505S	REPNSP4005	S152551000J	UGBC440	UGPU43TZ UGPU43CU	UGAS3530	-

INJECTION VESTIGE: T3 NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3= Open bushing
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING

- 8 = Head nozzle coil heater (REPNS450)
- T(8)=Nozzle head J thermocouple (S151051000J)
- ØC = Standard: 9 - On request: 10
- Ød = Standard: 1,0÷3,3

