


## S Single Cavity Application

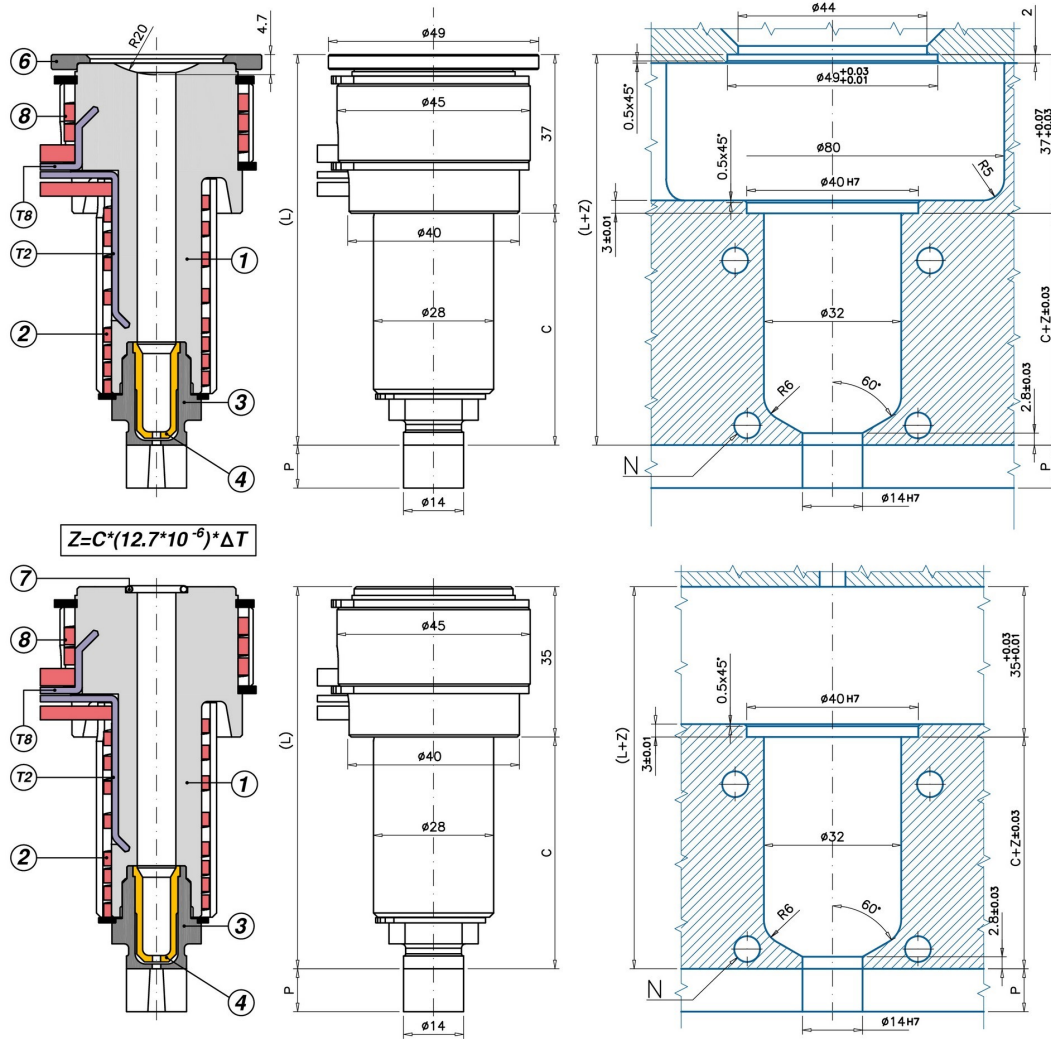

## M MultiCavity Application

Code	-P 0/1	C - L	1	2	T(2)	3 - 3/P	4/0 - 4/1	6	7	8	T(8)		
UGER4601MA	-P 0/1	C=54 L=89	UGCR4501M	REPNSP4001	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11	REPNS450	S151051000J
UGER4601SA	-P 0/1	C=54 L=91	UGCR4501S	REPNSP4001	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-	REPNS450	S151051000J
UGER4602MA	-P 0/1	C=84 L=119	UGCR4502M	REPNSP4002	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11	REPNS450	S151051000J
UGER4602SA	-P 0/1	C=84 L=121	UGCR4502S	REPNSP4002	S151051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-	REPNS450	S151051000J
UGER4603MA	-P 0/1	C=114 L=149	UGCR4503M	REPNSP4003	S151551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11	REPNS450	S151051000J
UGER4603SA	-P 0/1	C=114 L=151	UGCR4503S	REPNSP4003	S151551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-	REPNS450	S151051000J
UGER4604MA	-P 0/1	C=164 L=199	UGCR4504M	REPNSP4004	S152051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11	REPNS450	S151051000J
UGER4604SA	-P 0/1	C=164 L=201	UGCR4504S	REPNSP4004	S152051000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-	REPNS450	S151051000J
UGER4605MA	-P 0/1	C=214 L=249	UGCR4505M	REPNSP4005	S152551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	-	UGACOR11	REPNS450	S151051000J
UGER4605SA	-P 0/1	C=214 L=251	UGCR4505S	REPNSP4005	S152551000J	UGBC43	UGBC43P	UGPU43TZ	UGPU43CU	UGAS3530	-	REPNS450	S151051000J

INJECTION VESTIGE: T3B / T3BP NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3 = Closed bushing
- (Ød = Standard: 1,0-1,2-1,5-2,0-2,5-3,0)
- 3/P = Bushing with machinable prolongation
- (Ød = Standard: 1,2-1,5-2,0-2,5-3,0)
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING

- 8 = Head nozzle coil heater (REPNS450)
- T(8)=Nozzle head J thermocouple (S151051000J)
- ØC = Standard : 9 - On request: 10
- P = Standard: 25 - On request: 0,5 ÷ 24.9

