ER-TR model nozzles series 5500

S Single Cavity Application

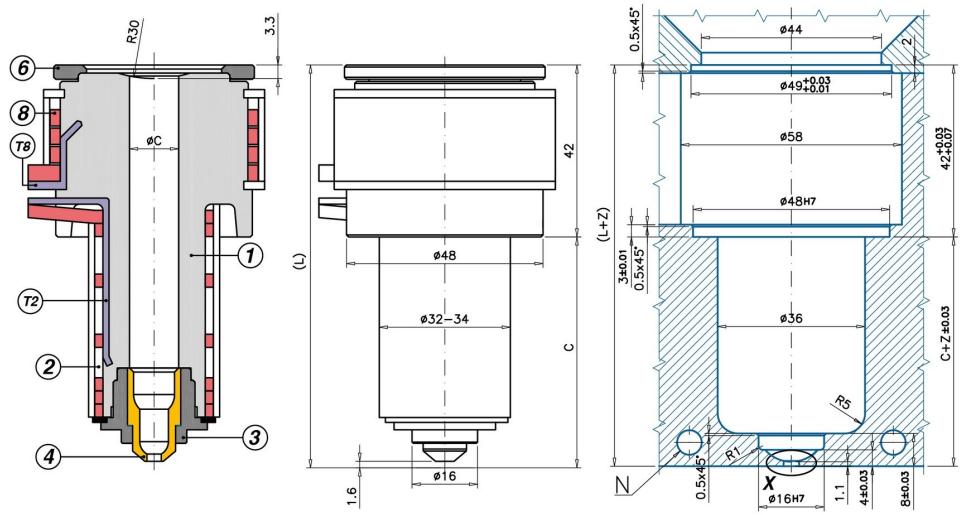

$Z=C*(12.7*10^{-6})*\Delta T$

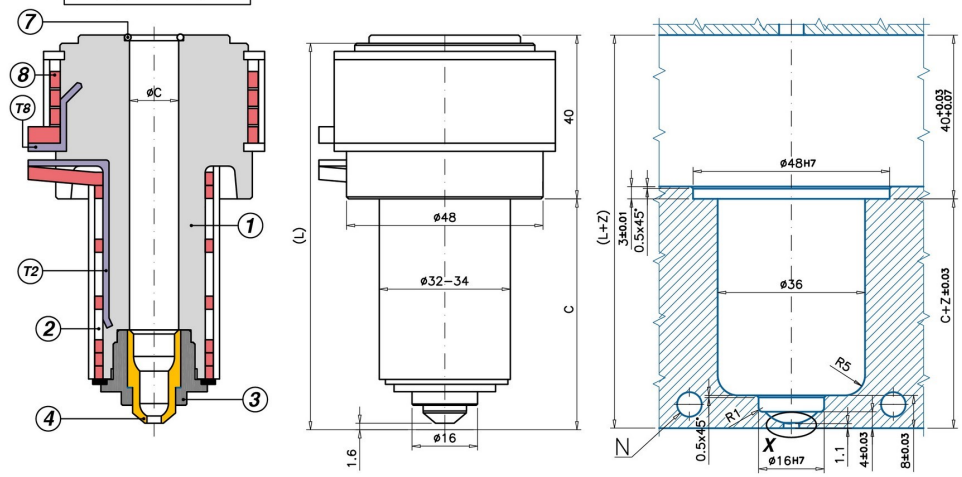

M MultiCavity Application

Code		C - L	1	2	T(2)	3	4/0 - 4/1		6	7
UGER5501MA	**0/1**	C=54 L=94	UGCR5501M	REPNSP5001	S151051000J	UGBC540	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5501SA	**0/1**	C=54 L=96	UGCR5501S	REPNSP5001	S151051000J	UGBC540	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5502MA	**0/1**	C=84 L=124	UGCR5502M	REPNSP5002	S151051000J	UGBC540	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5502SA	**0/1**	C=84 L=126	UGCR5502S	REPNSP5002	S151051000J	UGBC540	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5503MA	**0/1**	C=114 L=154	UGCR5503M	REPNSP5003	S151551000J	UGBC540	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5503SA	**0/1**	C=114 L=156	UGCR5503S	REPNSP5003	S151551000J	UGBC540	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5504MA	**0/1**	C=164 L=204	UGCR5504M	REPNSP5004	S152051000J	UGBC540	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5504SA	**0/1**	C=164 L=206	UGCR5504S	REPNSP5004	S152051000J	UGBC540	UGPU53TZ	UGPU53CU	UGAS4937	-
UGER5505MA	**0/1**	C=214 L=254	UGCR5505M	REPNSP5005	S152551000J	UGBC540	UGPU53TZ	UGPU53CU	-	UGACOR14
UGER5505SA	**0/1**	C=214 L=256	UGCR5505S	REPNSP5005	S152551000J	UGBC540	UGPU53TZ	UGPU53CU	UGAS4937	-

INJECTION VESTIGE: T3 NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
3= Open bushing
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
6 = Centering ring
7 = O-RING

8 = Head nozzle coil heater **(REPNS550)**
T(8)=Nozzle head J thermocouple **(S151051000J)**
ØC = Standard : 12 - On request: 13
Ød = standard: 1,0÷3,7





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it