


S Single Cavity Application

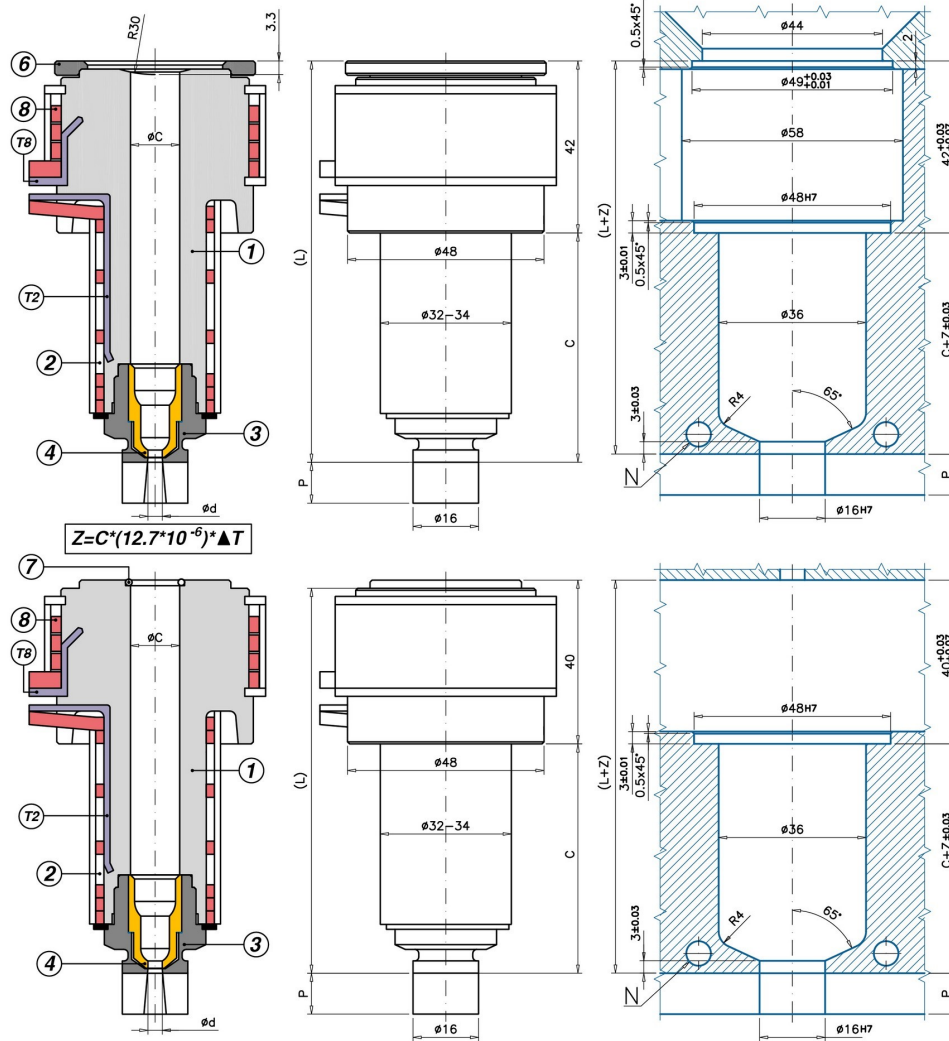

M MultiCavity Application

Code	C - L	1	2	T(2)	3 - 3/P	4/0 - 4/1	6	7	8	T(8)		
UGER5601MA	-P 0/1 C=54 L=94	UGCR5501M	REPNSP5001	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14	REPNS550	S151051000J
UGER5601SA	-P 0/1 C=54 L=96	UGCR5501S	REPNSP5001	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-	REPNS550	S151051000J
UGER5602MA	-P 0/1 C=84 L=124	UGCR5502M	REPNSP5002	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14	REPNS550	S151051000J
UGER5602SA	-P 0/1 C=84 L=126	UGCR5502S	REPNSP5002	S151051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-	REPNS550	S151051000J
UGER5603MA	-P 0/1 C=114 L=154	UGCR5503M	REPNSP5003	S151551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14	REPNS550	S151051000J
UGER5603SA	-P 0/1 C=114 L=156	UGCR5503S	REPNSP5003	S151551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-	REPNS550	S151051000J
UGER5604MA	-P 0/1 C=164 L=204	UGCR5504M	REPNSP5004	S152051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14	REPNS550	S151051000J
UGER5604SA	-P 0/1 C=164 L=206	UGCR5504S	REPNSP5004	S152051000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-	REPNS550	S151051000J
UGER5605MA	-P 0/1 C=214 L=254	UGCR5505M	REPNSP5005	S152551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	-	UGACOR14	REPNS550	S151051000J
UGER5605SA	-P 0/1 C=214 L=256	UGCR5505S	REPNSP5005	S152551000J	UGBC53	UGBC53P	UGPU53TZ	UGPU53CU	UGAS4937	-	REPNS550	S151051000J

INJECTION VESTIGE: T3B / T3BP NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3 = Closed bushing
- (Ød = Standard: 1,0-1,2-1,5-2,0-2,5-3,0-3,5)
- 3/P = Bushing with machinable prolongation
- (Ød = Standard: 1,2-1,5-2,0-2,5-3,0-3,5)
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING

- 8 = Head nozzle coil heater (REPNS550)
- T(8)=Nozzle head J thermocouple (S151051000J)
- ØC = Standard : 12 - On request: 13
- P = Standard: 25 - On request: 0,5 - 24.9

