


S Single Cavity Application

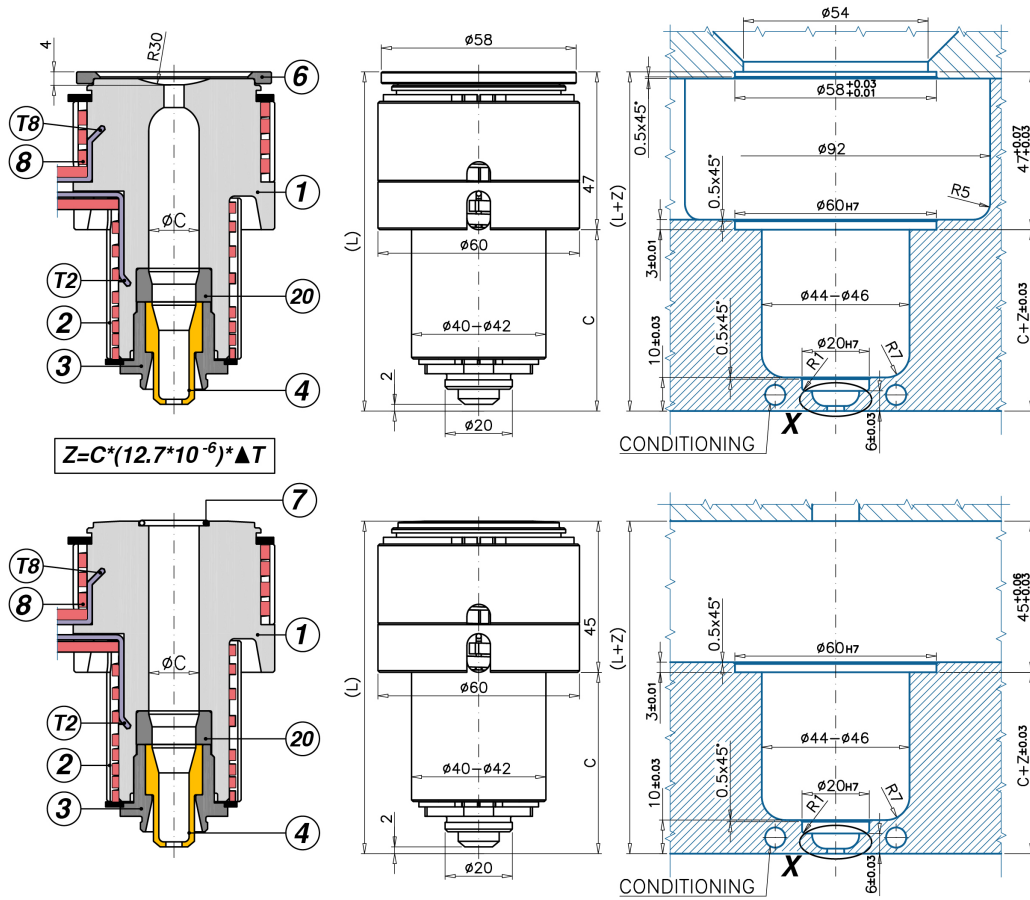

M MultiCavity Application

Code	C - L	1	2	T(2)	3	4/0 - 4/1	6	7
UGER6501MA	0/1 C=34 L=79	UGCR6501M	REPNSP6001	S151051000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6501SA	0/1 C=34 L=81	UGCR6501S	REPNSP6001	S151051000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6502MA	0/1 C=54 L=99	UGCR6502M	REPNSP6002	S151051000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6502SA	0/1 C=54 L=101	UGCR6502S	REPNSP6002	S151051000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6503MA	0/1 C=74 L=119	UGCR6503M	REPNSP6003	S151551000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6503SA	0/1 C=74 L=121	UGCR6503S	REPNSP6003	S151551000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6504MA	0/1 C=94 L=139	UGCR6504M	REPNSP6004	S151551000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6504SA	0/1 C=94 L=141	UGCR6504S	REPNSP6004	S151551000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6505MA	0/1 C=114 L=159	UGCR6505M	REPNSP6005	S151551000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6505SA	0/1 C=114 L=161	UGCR6505S	REPNSP6005	S151551000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-
UGER6507MA	0/1 C=164 L=209	UGCR6507M	REPNSP6007	S152051000J	UGBC610	UGPU63TZ UGPU63CU	-	UGACOR17
UGER6507SA	0/1 C=164 L=211	UGCR6507S	REPNSP6007	S152051000J	UGBC610	UGPU63TZ UGPU63CU	UGAS5848	-

INJECTION VESTIGE: T3 NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: plastics frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

- 1 = Nozzle body
- (M=MultiCavity / S=Single Cavity)
- 2= Coil heater
- T(2) = J thermocouple
- 3 = Open bushing
- 4/0 = Abrasive charges tip
- 4/1 = Cu-Be tip
- 6 = Centering ring
- 7 = O-RING

- 8 = Head nozzle coil heater (REPNS650)
- T(8)=Nozzle head J thermocouple (S151051000J)
- ØC = Standard : 16 - On request: 17
- Ød = standard: 1,0÷4,3

