S Single Cavity Application

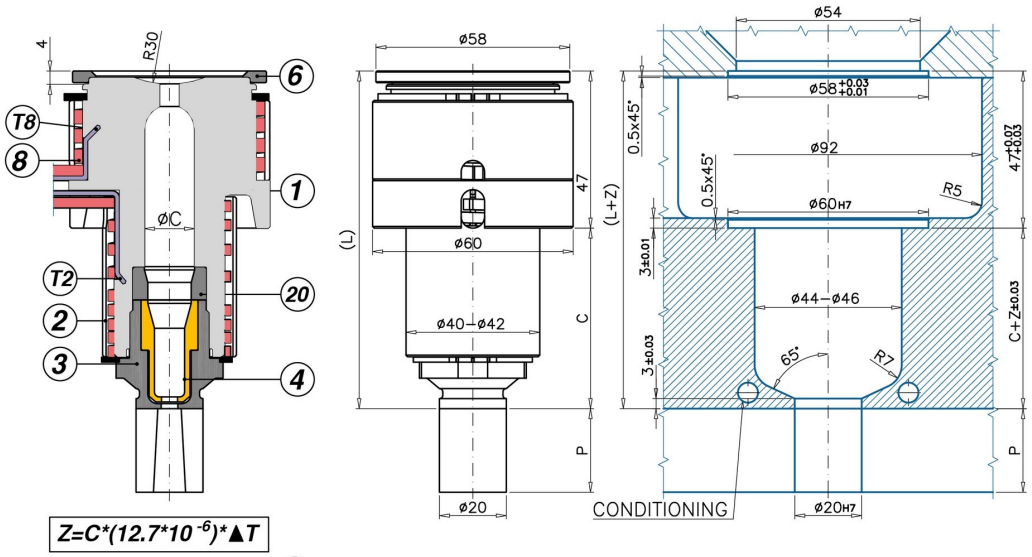

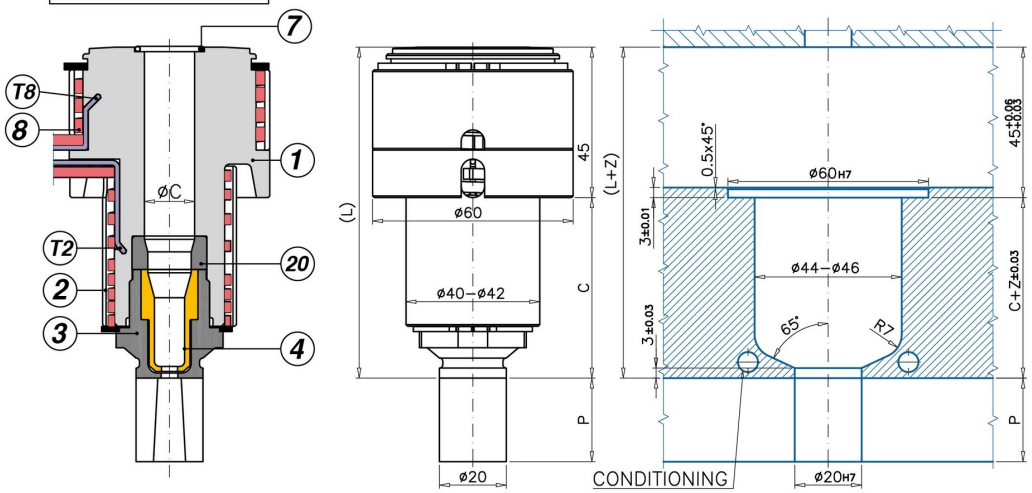

M MultiCavity Application

Code		C - L	1	2	T(2)	3 - 3/P		4/0 - 4/1		6	7
UGER6601MA	**-/P 0/1**	C=34 L=79	UGCR6501M	REPNSP6001	S151051000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	-	UGACOR17
UGER6601SA	**-/P 0/1**	C=34 L=81	UGCR6501S	REPNSP6001	S151051000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	UGAS5848	-
UGER6602MA	**-/P 0/1**	C=54 L=99	UGCR6502M	REPNSP6002	S151051000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	-	UGACOR17
UGER6602SA	**-/P 0/1**	C=54 L=101	UGCR6502S	REPNSP6002	S151051000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	UGAS5848	-
UGER6603MA	**-/P 0/1**	C=74 L=119	UGCR6503M	REPNSP6003	S151551000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	-	UGACOR17
UGER6603SA	**-/P 0/1**	C=74 L=121	UGCR6503S	REPNSP6003	S151551000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	UGAS5848	-
UGER6604MA	**-/P 0/1**	C=94 L=139	UGCR6504M	REPNSP6004	S151551000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	-	UGACOR17
UGER6604SA	**-/P 0/1**	C=94 L=141	UGCR6504S	REPNSP6004	S151551000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	UGAS5848	-
UGER6605MA	**-/P 0/1**	C=114 L=159	UGCR6505M	REPNSP6005	S151551000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	-	UGACOR17
UGER6605SA	**-/P 0/1**	C=114 L=161	UGCR6505S	REPNSP6005	S151551000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	UGAS5848	-
UGER6607MA	**-/P 0/1**	C=164 L=209	UGCR6507M	REPNSP6007	S152051000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	-	UGACOR17
UGER6607SA	**-/P 0/1**	C=164 L=211	UGCR6507S	REPNSP6007	S152051000J	UGBC63	UGBC63P	UGPU63TZ	UGPU63CU	UGAS5848	-

INJECTION VESTIGE: T3B / T3BP NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS (T3B), OR ON SPRUES (T3BP). - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
3 = Closed bushing
(Ød = Standard: 1,0-1,2-1,5-2,0-2,5-3,0-3,5-4,0)
3/P = Bushing with machinable prolungation
(Ød = Standard: 1,2-1,5-2,0-2,5-3,0-3,5-4,0)
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
6 = Centering ring
7 = O-RING

8 = Head nozzle coil heater **(REPNS650)**
T(8)=Nozzle head J thermocouple **(S151051000J)**
ØC = Standard : 16 - On request: 17
P = Standard: 25 - On request: 0,5 ÷ 24.9





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it