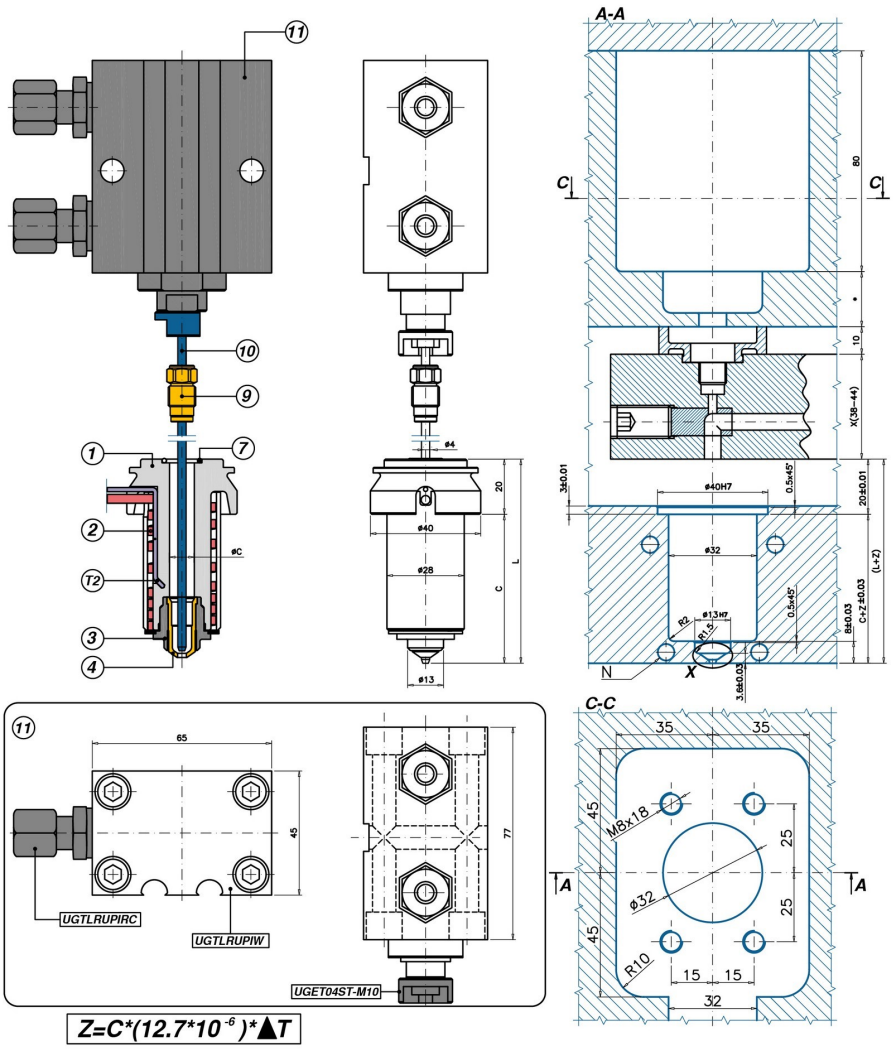

M MultiCavity Application

Code	L - C	1	2	T(2)	3	4 - 0/1	7
UGET4011A0	L=74 C=54	UGCR4001M	REPNSP4001	S151051000J	UGBC440	UGPU45TZ	UGACOR11
UGET4011A1	L=74 C=54	UGCR4001M	REPNSP4001	S151051000J	UGBC440	UGPU45CU	UGACOR11
UGET4012A0	L=104 C=84	UGCR4002M	REPNSP4002	S151051000J	UGBC440	UGPU45TZ	UGACOR11
UGET4012A1	L=104 C=84	UGCR4002M	REPNSP4002	S151051000J	UGBC440	UGPU45CU	UGACOR11
UGET4013A0	L=134 C=114	UGCR4003M	REPNSP4003	S151551000J	UGBC440	UGPU45TZ	UGACOR11
UGET4013A1	L=134 C=114	UGCR4003M	REPNSP4003	S151551000J	UGBC440	UGPU45CU	UGACOR11
UGET4014A0	L=184 C=164	UGCR4004M	REPNSP4004	S152051000J	UGBC440	UGPU45TZ	UGACOR11
UGET4014A1	L=184 C=164	UGCR4004M	REPNSP4004	S152051000J	UGBC440	UGPU45CU	UGACOR11
UGET4015A0	L=234 C=214	UGCR4505M	REPNSP4005	S152551000J	UGBC440	UGPU45TZ	UGACOR11
UGET4015A1	L=234 C=214	UGCR4505M	REPNSP4005	S152551000J	UGBC440	UGPU45CU	UGACOR11

INJECTION VESTIGE: T6 Direct injection nozzles for MULTI CAVITY applications. With needle valve activated by OUTER HYDRAULIC PISTON. Suitable for: -excellent aesthetic finish of the injection point - intense colours and colour change - abrasive reinforcements (choose the 4/0 tip)

1 = Nozzle body
2 = Coil heater
T2= J thermocouple
3 = Opened bushing
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
7 = O-RING

9 = **UGET04UGU-DLC** Needle valve sealing with wear-resistant coating
10 = **UGET04TT-DLC** Needle valve Ø4 with wear-resistant coating (length to be defined)
11= **UGTLRUPIK4** Hydraulic piston kit (piston UGTLRUPIW + needle valve support UGET04ST-M10 + N.2 fittings UGTLRUPIRC)

ØC = Standard : 9 - On request: 10
Ød = standard: 1,0 ÷ 3,0





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it