S Single Cavity Application

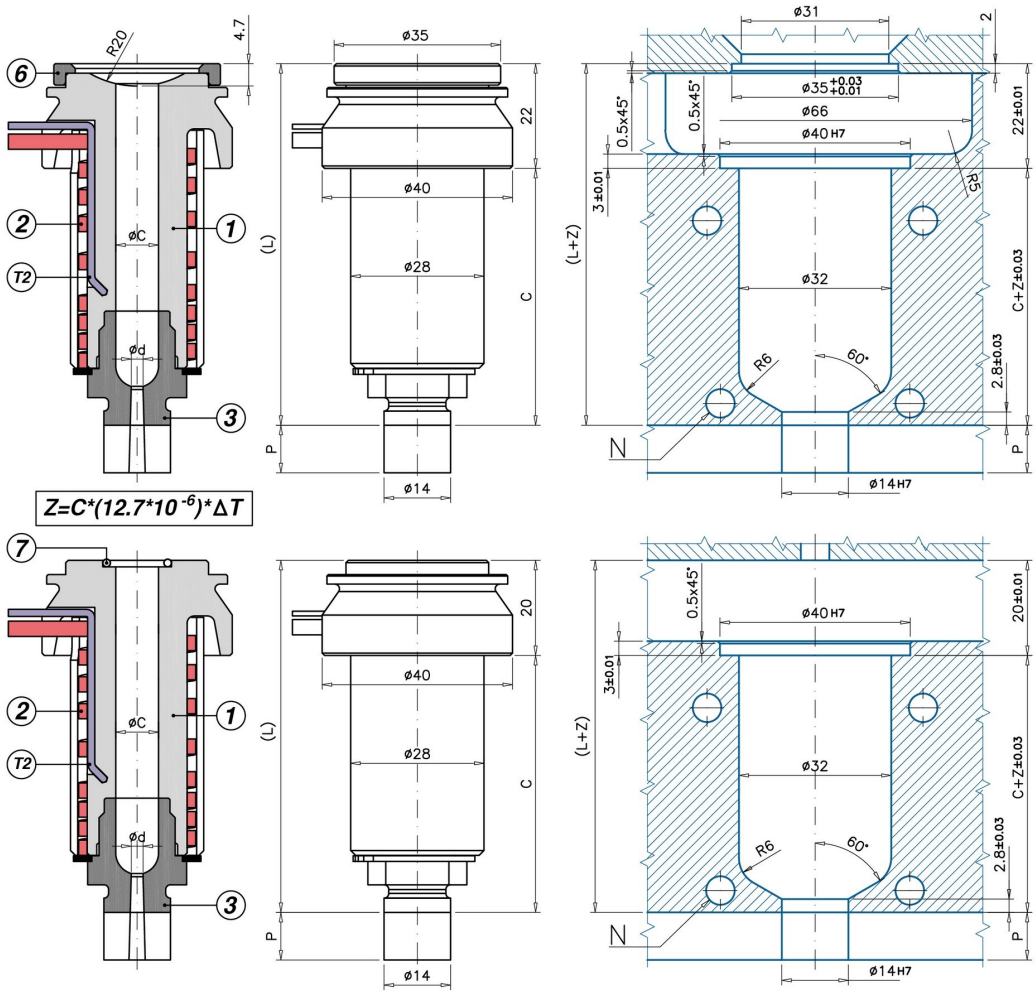

M MultiCavity Application

Code		C - L	1	2	T(2)	3 a 3° (-/P)	3 a 5° (-/P)	6	7
UGBE4001MA	**-/P 3/5**	C=54 L=74	UGCR4001M	REPNSP4001	S151051000J	UGBC40/P	UGBC405/P	-	UGACOR11
UGBE4001SA	**-/P 3/5**	C=54 L=76	UGCR4001S	REPNSP4001	S151051000J	UGBC40/P	UGBC405/P	UGAS3530	-
UGBE4002MA	**-/P 3/5**	C=84 L=104	UGCR4002M	REPNSP4002	S151051000J	UGBC40/P	UGBC405/P	-	UGACOR11
UGBE4002SA	**-/P 3/5**	C=84 L=106	UGCR4002S	REPNSP4002	S151051000J	UGBC40/P	UGBC405/P	UGAS3530	-
UGBE4003MA	**-/P 3/5**	C=114 L=134	UGCR4003M	REPNSP4003	S151551000J	UGBC40/P	UGBC405/P	-	UGACOR11
UGBE4003SA	**-/P 3/5**	C=114 L=136	UGCR4003S	REPNSP4003	S151551000J	UGBC40/P	UGBC405/P	UGAS3530	-
UGBE4004MA	**-/P 3/5**	C=164 L=184	UGCR4004M	REPNSP4004	S152051000J	UGBC40/P	UGBC405/P	-	UGACOR11
UGBE4004SA	**-/P 3/5**	C=164 L=186	UGCR4004S	REPNSP4004	S152051000J	UGBC40/P	UGBC405/P	UGAS3530	-
UGBE4005MA	**-/P 3/5**	C=214 L=234	UGCR4005M	REPNSP4005	S152551000J	UGBC40/P	UGBC405/P	-	UGACOR11
UGBE4005SA	**-/P 3/5**	C=214 L=236	UGCR4005S	REPNSP4005	S152551000J	UGBC40/P	UGBC405/P	UGAS3530	-

INJECTION VESTIGE: T1 OPEN FLOW NOZZLES - YES: injection on sprues - YES: intense colours, colour change and abrasive reinforcements - YES: MULTI-CAVITY applications - NO: direct moulding onto the part - NO: SINGLE CAVITY applications, for plastics with melting temperature higher than 250°C - NO: plastics leaving stringings/droolings while mould opens; in such instance you can use EP type nozzles - T2B/T2BP injection vestige.

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J Thermocouple
3 = Bushing
3/P = Bushing with machinable prolungation
5 = Copper ring
6 = Centering Ring
7 = O-RING
ØC = Standard: 9 - On request: 10
Ød = Standard: 1,2-1,5-2,0-2,5-3,0-3,5-4,0
P = Standard: 25 - On request: 0,5 ÷ 24.9





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it