ER-TR model nozzles series 3500

S Single Cavity Application

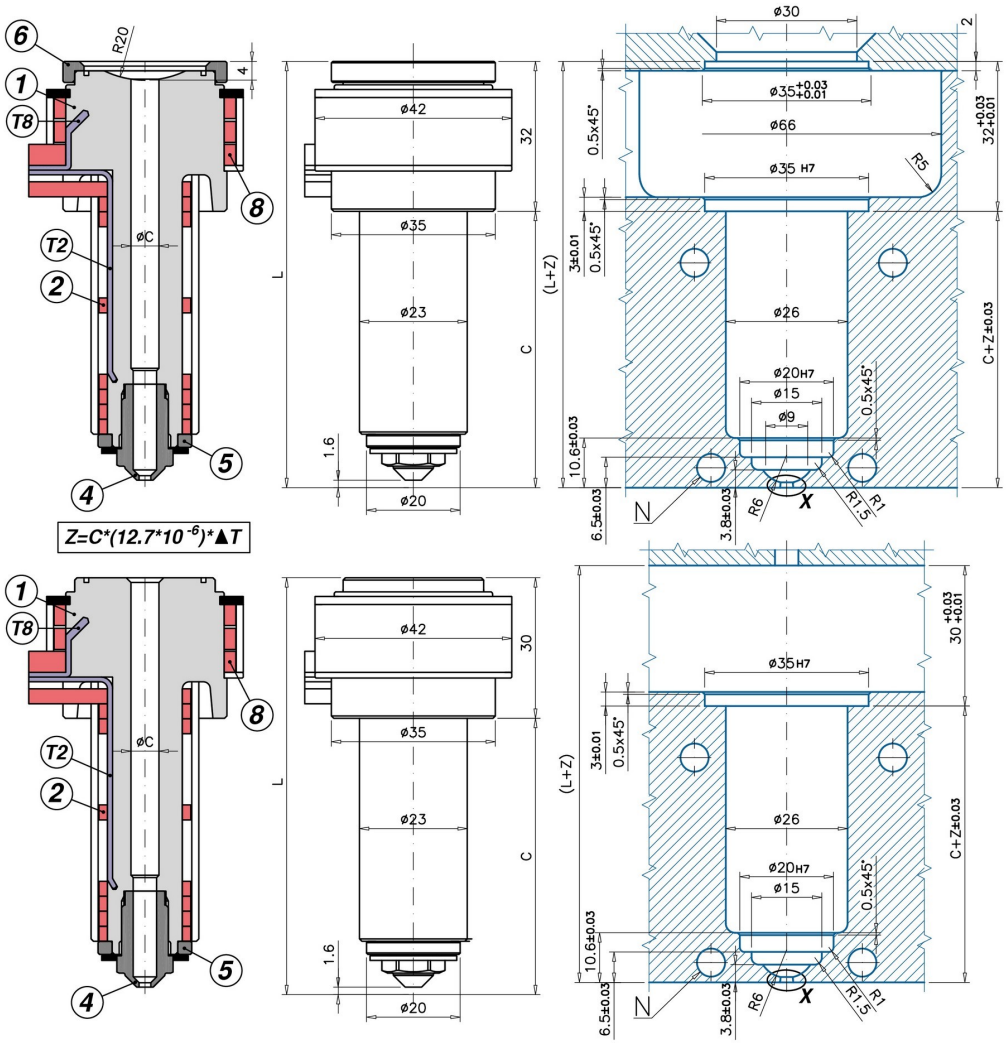

M MultiCavity Application

Code		C - L	1	2	T(2)	4/0 - 4/1		5	6
UGER3501MA	**0/1**	C=59 L=89	UGCR3501M	REPNSP3001	S151051000J	UGPU32TZ	UGPU32CU	UGER300AT	-
UGER3501SA	**0/1**	C=59 L=91	UGCR3501S	REPNSP3001	S151051000J	UGPU32TZ	UGPU32CU	UGER300AT	UGAS3530
UGER3502MA	**0/1**	C=89 L=119	UGCR3502M	REPNSP3002	S151551000J	UGPU32TZ	UGPU32CU	UGER300AT	-
UGER3502SA	**0/1**	C=89 L=121	UGCR3502S	REPNSP3002	S151551000J	UGPU32TZ	UGPU32CU	UGER300AT	UGAS3530
UGER3503MA	**0/1**	C=119 L=149	UGCR3503M	REPNSP3003	S151551000J	UGPU32TZ	UGPU32CU	UGER300AT	-
UGER3503SA	**0/1**	C=119 L=151	UGCR3503S	REPNSP3003	S151551000J	UGPU32TZ	UGPU32CU	UGER300AT	UGAS3530
UGER3504MA	**0/1**	C=159 L=189	UGCR3504M	REPNSP3004	S152051000J	UGPU32TZ	UGPU32CU	UGER300AT	-
UGER3504SA	**0/1**	C=159 L=191	UGCR3504S	REPNSP3004	S152051000J	UGPU32TZ	UGPU32CU	UGER300AT	UGAS3530

INJECTION VESTIGE: T3 NOZZLES WITH HEATED HEAD FOR DIRECT MOLDING ON PARTS WHERE IS NOT IMPORTANT THE AESTHETIC APPEARANCE OF THE INJECTION WITNESS. - YES: frequent color change - YES: intense colours - YES: abrasive reinforcements (choose the 4/0 tip) - YES: SINGLE and MULTI-CAVITY applications - NO: plastics that leave stringings / droolings while mould opens

1 = Nozzle body
(M=MultiCavity / S=Single Cavity)
2= Coil heater
T(2) = J thermocouple
4/0 = Abrasive charges tip
4/1 = Cu-Be tip
5 = Titanium ring
6 = Centering ring

8 = Head nozzle coil heater **(REPNS350)**
T(8)=Nozzle head J thermocouple **(S151051000J)**
ØC = Standard: 6 - A richiesta: 7
Ød = standard: 0,6÷2,0
O-RING on request





@Copyright 2026 by Emp Srl Italy - www.emp.it - info@emp.it